

Skydome™ LED

Suspended | FSDL-22|33|44-CS



FOCAL POINT®



BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS



POWER OFF




POWER ON


COMPONENT KEY

FOCAL POINT

Cable Mount

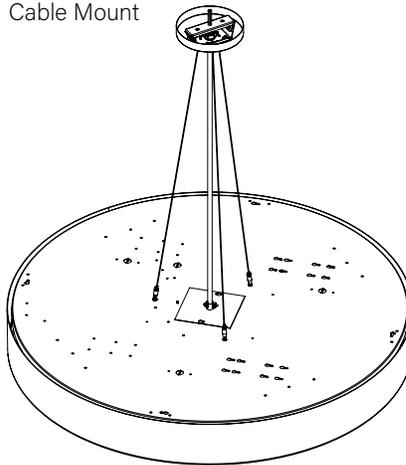

Stem Mount

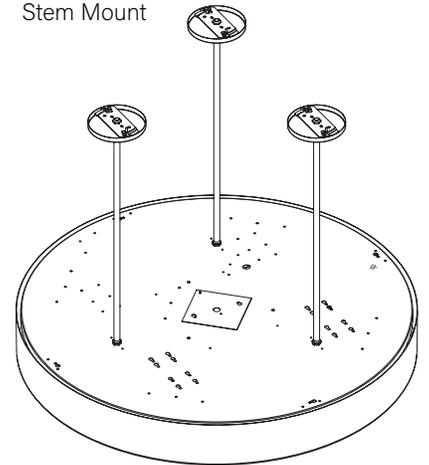


WEIGHTS:

2' - 23 LBS - 2 PEOPLE RECOMMENDED FOR INSTALLATION

3' - 50 LBS - 3 PEOPLE RECOMMENDED FOR INSTALLATION

4' - 72 LBS - 3 PEOPLE RECOMMENDED FOR INSTALLATION

CABLE MOUNT

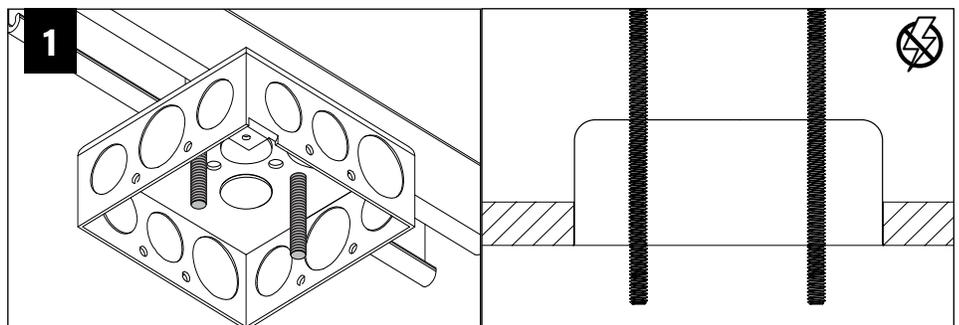

INSTALL J-BOX (BY OTHERS) AND RODS (BY OTHERS)
SECURE RODS TO STRUCTURE ABOVE

2

SECURE BRACKET TO STRUCTURE ABOVE

BY OTHERS

!

DO NOT SUSPENDED DIRECTLY FROM J-BOX BRACKET MUST BE SECURED INDEPENDENTLY TO STRUCTURE ABOVE TO SUPPORT AT MINIMUM THE WEIGHT OF THE FIXTURE (SEE PAGE 1)

MAKE ELECTRICAL CONNECTION

3

DEPRESS PLUNGER WHILE SUPPORTING LUMINAIRE

4

12" MINIMUM

SET SUSPENSION CABLE TO DESIRED LENGTH

!

5

TRIM EXCESS CABLE AT ADJUSTER END

6

⚡

STEM MOUNT

2' DIAMETER

1

120°

13"

7.5"

2

3' DIAMETER

1

120°

18"

10.375"

2

4' DIAMETER


1

90°


17.5"

12.375"

2

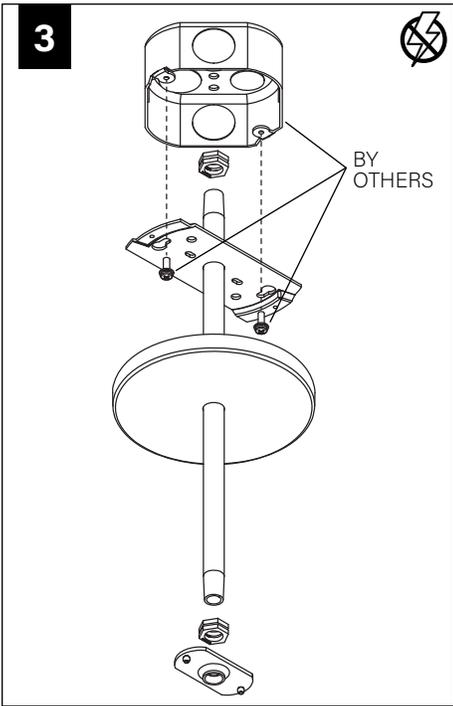


MAKE ELECTRICAL CONNECTION

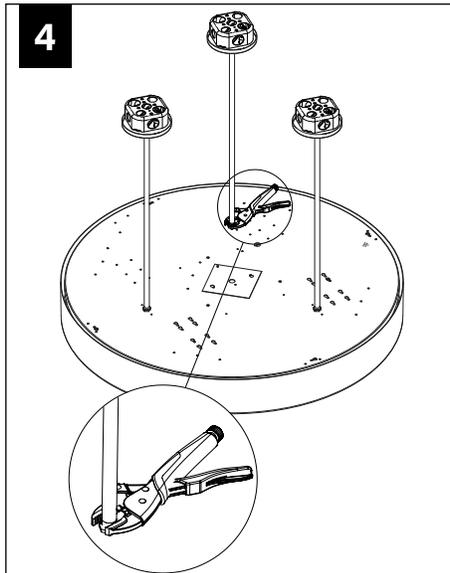


1. ATTACH THE STEM TO COVER. DO NOT OVER TIGHTEN STEM, THIS MAY CAUSE PINCHED WIRES.



2. USING PLIERS, SECURELY TIGHTEN LOCK NUT. STEM MUST BE SECURELY TIGHTENED AND UNABLE TO SPIN LOOSE.

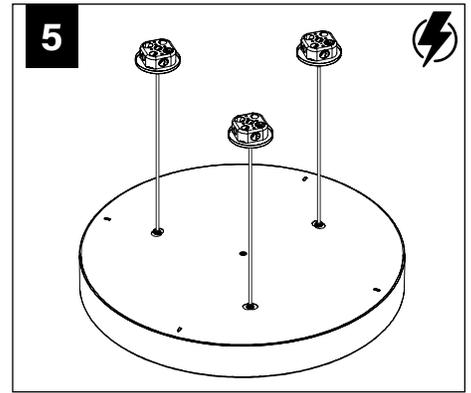

DRIVER SERVICE

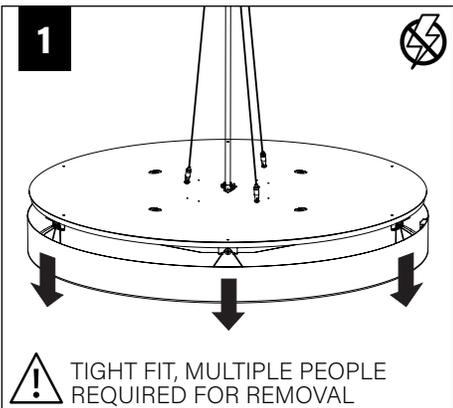

⚠ TIGHT FIT, MULTIPLE PEOPLE REQUIRED FOR REMOVAL

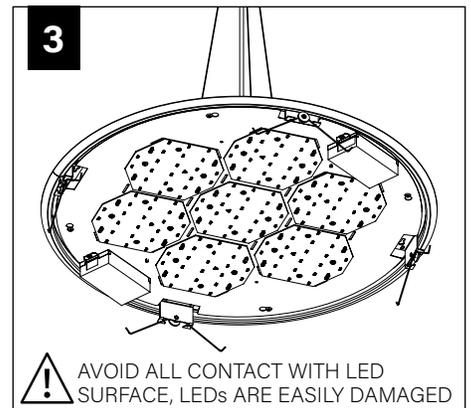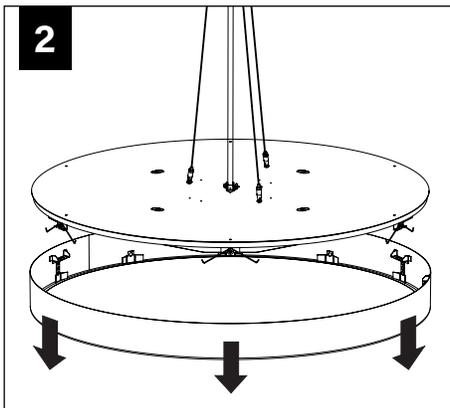

⚠ AVOID ALL CONTACT WITH LED SURFACE, LEDs ARE EASILY DAMAGED

EMERGENCY



SEE BATTERY MANUFACTURER INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT:

16.00'