

# id+ 3.5" round housing


FLC3D | FLC3W



FOCAL POINT®


**! LUMINAIRE MUST BE INSTALLED PRIOR TO DRYWALL CEILING. ALL GRID LUMINAIRES MUST BE SECURED TO STRUCTURE ABOVE. !**

NON-EMERGENCY - THERMALLY PROTECTED, NON-IC



FLC3D | FLC3W

**!** OPTIONAL BAR HANGERS SOLD SEPARATELY



KEY



POWER OFF



POWER ON



ATTENTION




LEVEL




SEE ADDITIONAL INSTRUCTIONS

EMERGENCY - REMOTE TEST SWITCH, NON-IC

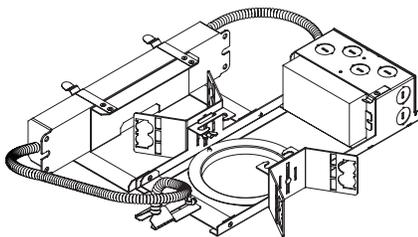


FLC3D | FLC3W

IC/CP




FLC3D | FLC3W

## WALL WASH ORIENTATION

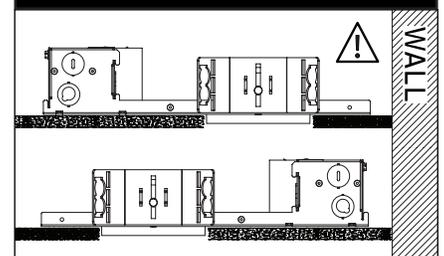


KEEP SHADED AREA FREE FROM OBSTRUCTION ABOVE CEILING



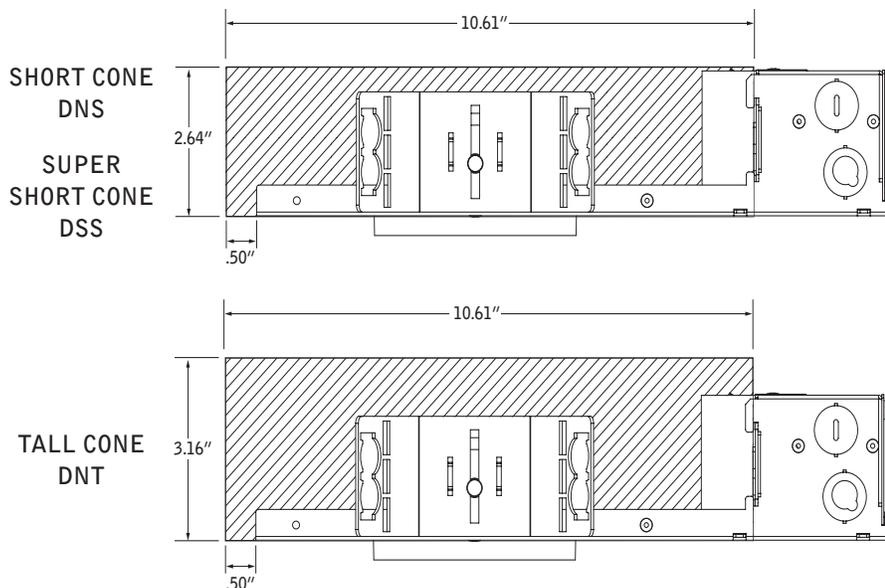


FOR ASTM E-283 AIR-TIGHT COMPLIANCE, SEAL IC HOUSING/RO TRIM WITH SILICONE CAULKING BETWEEN THE EDGE OF THE COLLAR AND CEILING MATERIAL. SEAL ALL ADDITIONAL HOLES IN HOUSING WITH ALUMINUM TAPE.





Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation). To prevent electrical shock, disconnect electrical supply before installation or servicing.

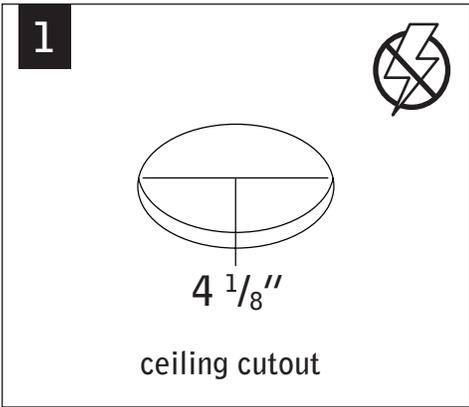

**GRID - 1/2" CONDUIT & CLIP (BY OTHERS)**

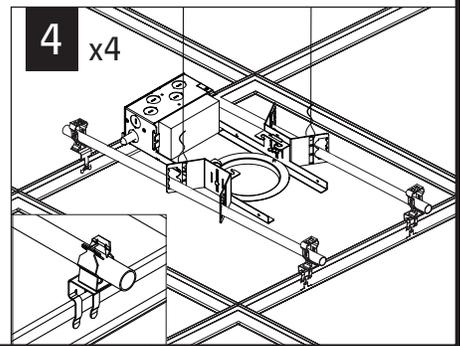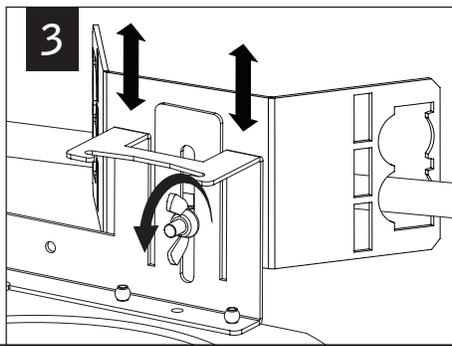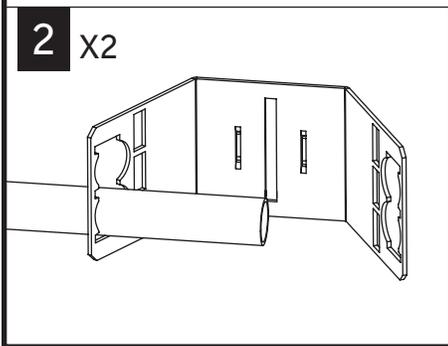



**GRID - BAR HANGERS (SOLD SEPARATELY)**

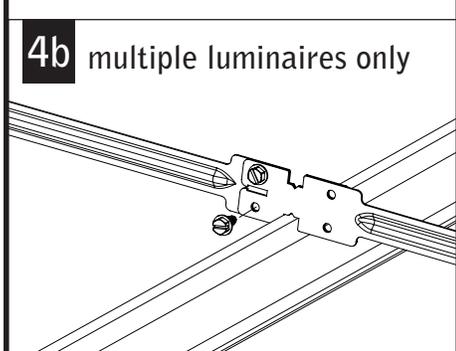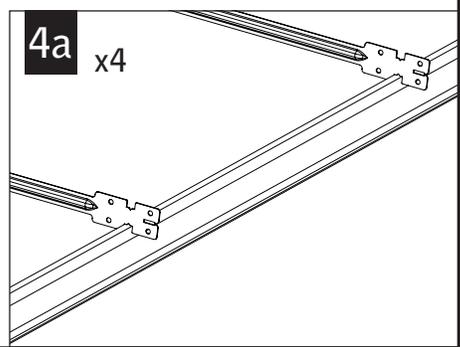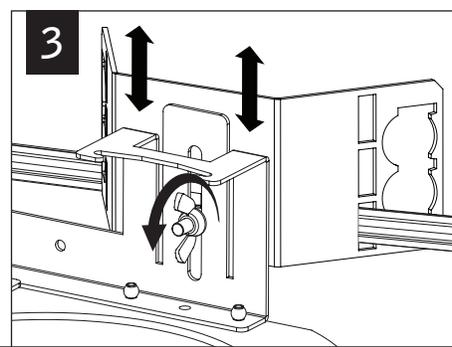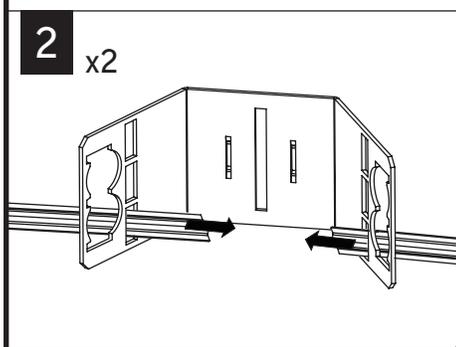




Fixtures must be installed by a qualified electrician (check with local and national codes for proper installation).  
To prevent electrical shock, disconnect electrical supply before installation or servicing.

# DRYWALL - BAR HANGERS

## WOOD STUDS




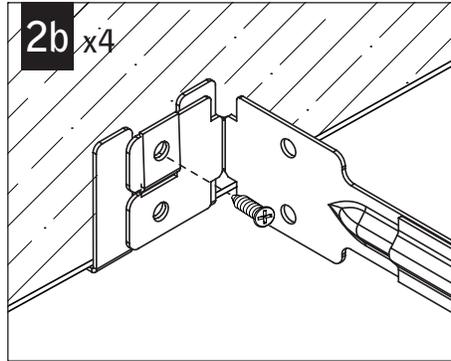
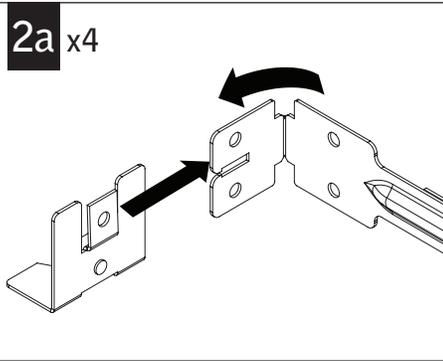


## METAL STUDS

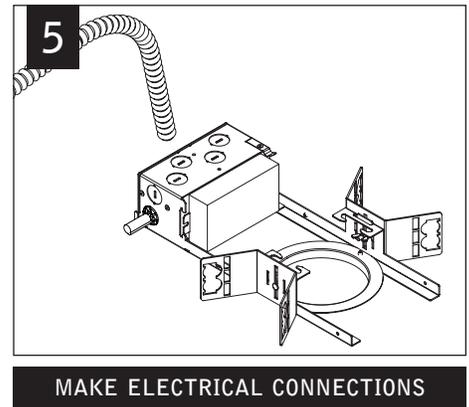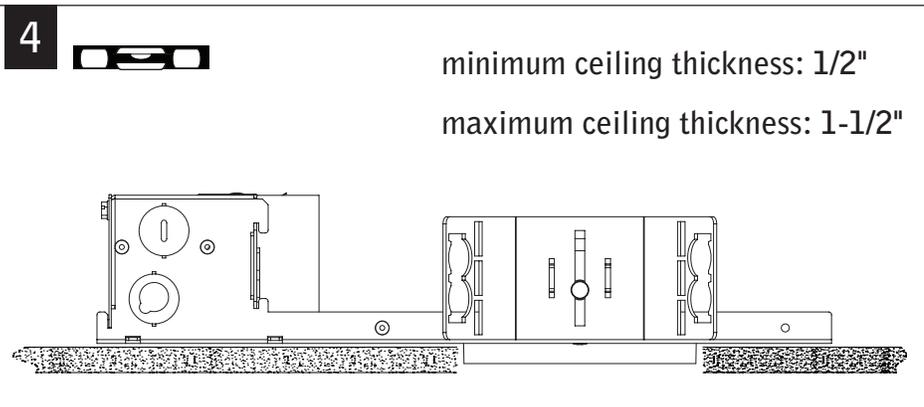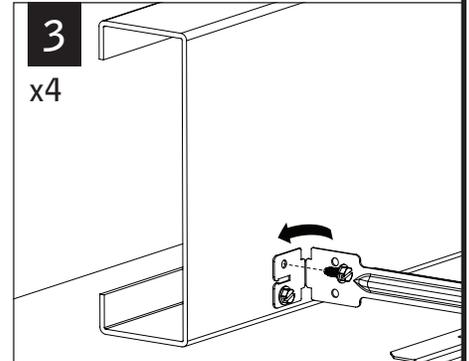


MAKE ELECTRICAL CONNECTIONS

# EMERGENCY - REMOTE TEST SWITCH ⚠ ABOVE CEILING ACCESS REQUIRED ⚠

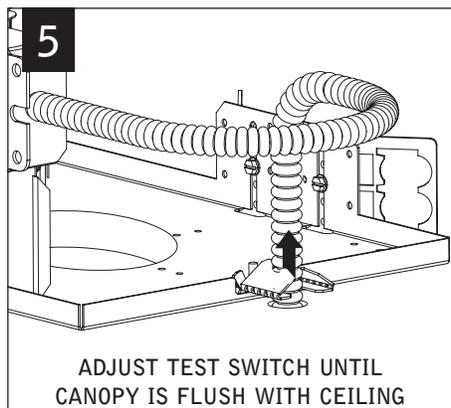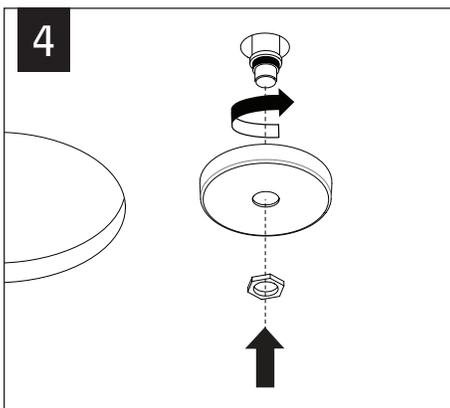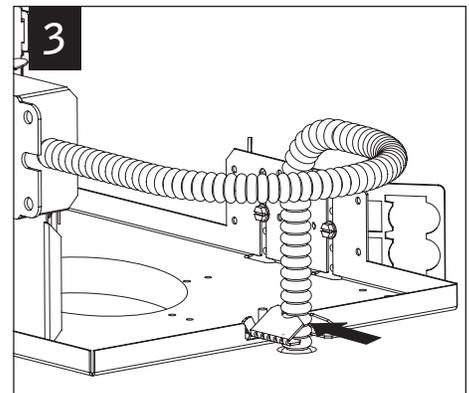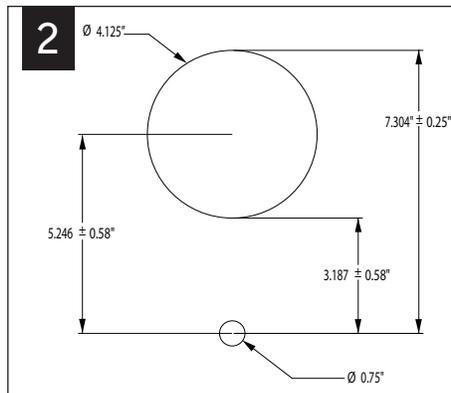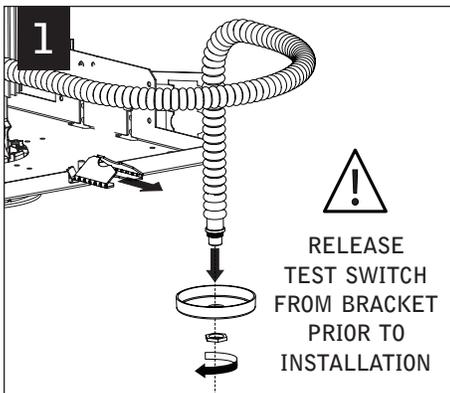

ADJUST TEST SWITCH UNTIL CANOPY IS FLUSH WITH CEILING

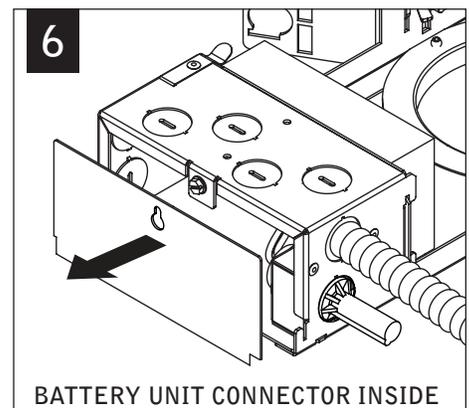

BATTERY UNIT CONNECTOR INSIDE

Fixtures must be installed by a qualified electrician (check with local and national codes for proper installation).  
To prevent electrical shock, disconnect electrical supply before installation or servicing.

7



SEE BATTERY  
MANUFACTURER  
INSTRUCTIONS



DO NOT MATE BATTERY  
UNIT CONNECTOR  
UNTIL INSTALLATION  
IS COMPLETE AND A.C.  
POWER IS SUPPLIED

### EM- MOUNTING HEIGHT



SEE BATTERY MANUFACTURER  
INSTRUCTIONS


EMERGENCY MAXIMUM MOUNTING HEIGHT:  
DOWNLIGHT: 21.4'  
WALL WASH: 16.1'

### DRIVER SERVICE




TO PREVENT ELECTRICAL SHOCK,  
DISCONNECT ELECTRICAL SUPPLY  
BEFORE SERVICING

1

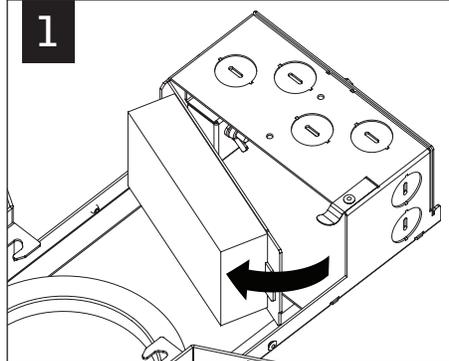

2

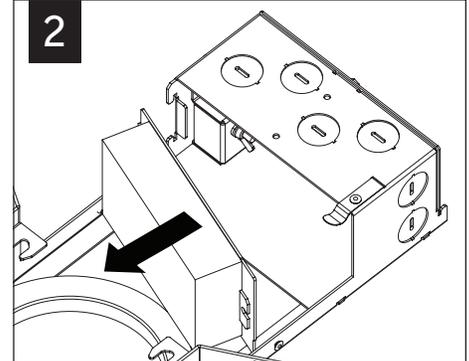

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings. The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.