

ID+ Cylinder - Stem Mount

FLCY2 | FLCY3 | FLCY4 - Shallow Canopy



FOCAL POINT®

BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY


- ATTENTION**
- SEE ADDITIONAL INSTRUCTIONS**
- POWER OFF**
- POWER ON**

COMPONENT KEY

SHALLOW CANOPY


SWIVEL STEM MOUNT

Shipped Assembled

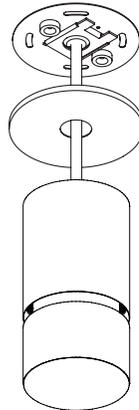

FIXED STEM MOUNT



Shipped Assembled

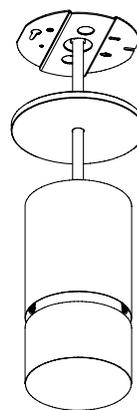

DECORATIVE SHALLOW CANOPY

SWIVEL STEM MOUNT

Shipped Assembled

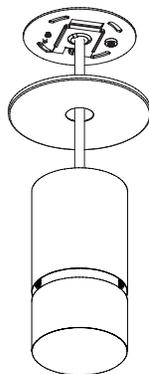



DECORATIVE J-BOX COVER



MOUNTING SCREWS #72029

FIXED STEM MOUNT

Shipped Assembled

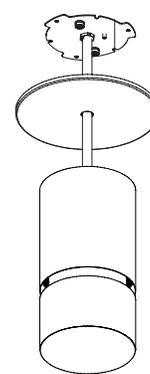


DECORATIVE J-BOX COVER



MOUNTING SCREWS #72023

4" OCTAGONAL J-BOX REQUIRED

J-BOX BY OTHERS

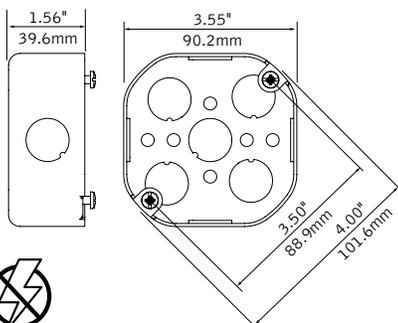


EMERGENCY



PRIOR TO LUMINAIRE INSTALLATION, SEE **PAGE 6** FOR EMERGENCY INSTALLATION INSTRUCTIONS.

SWIVEL STEM

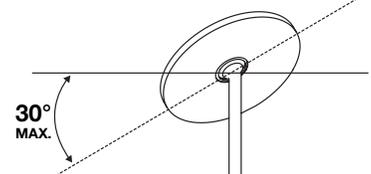

30° MAX.









MAXIMUM CEILING SLOPE:







30°

SHALLOW CANOPY






FIXED STEM

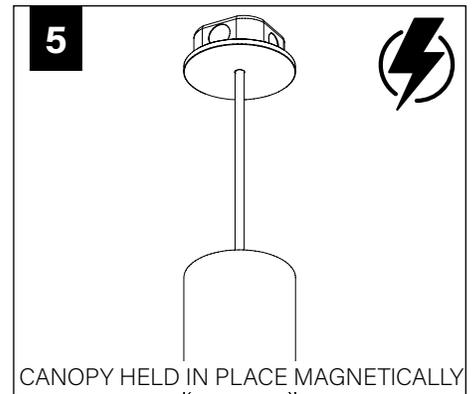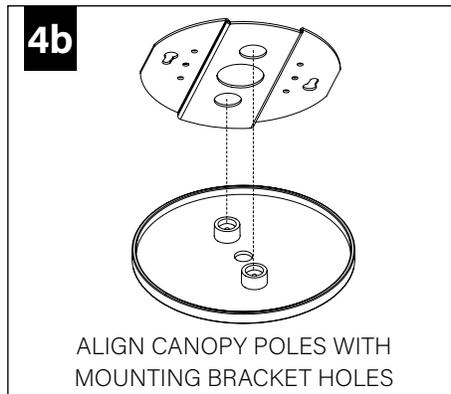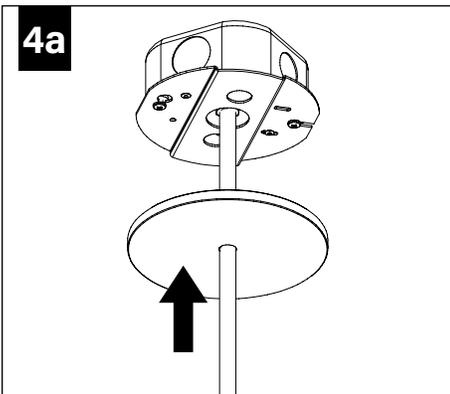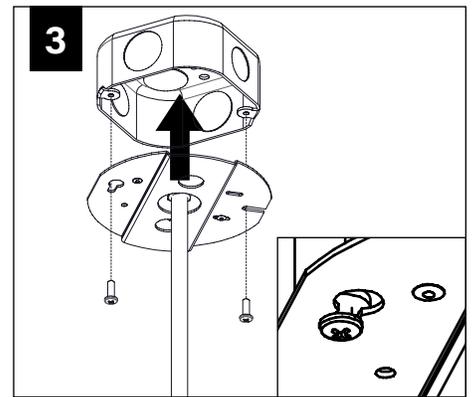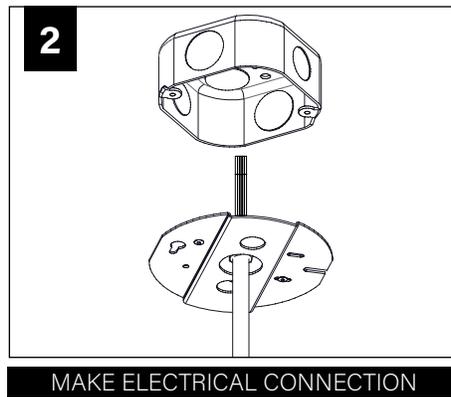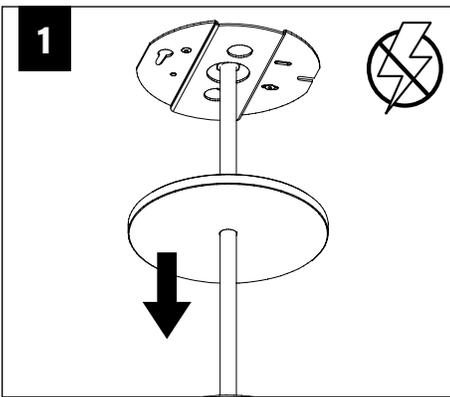






SWIVEL STEM

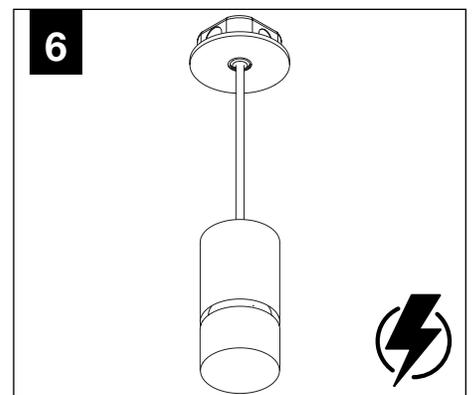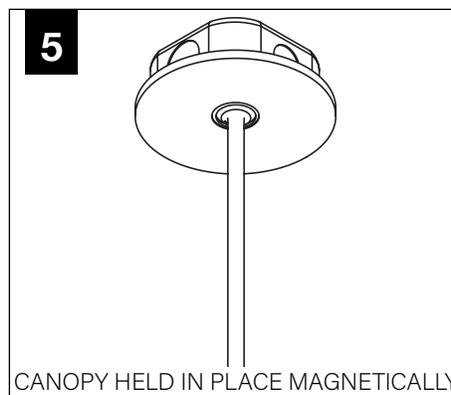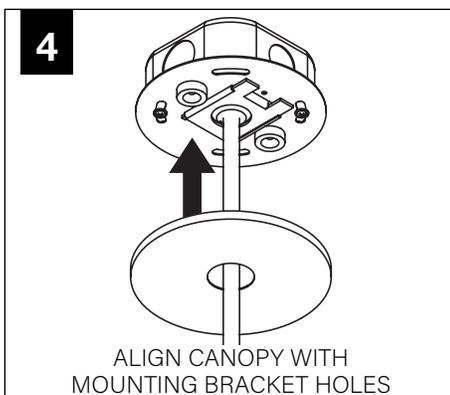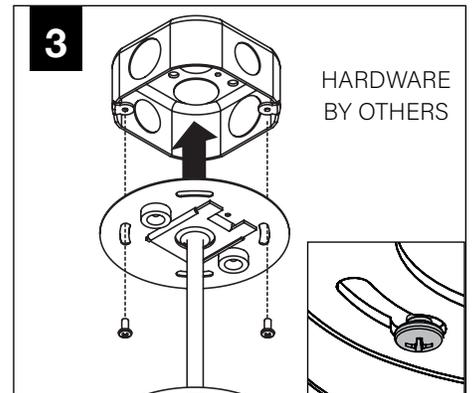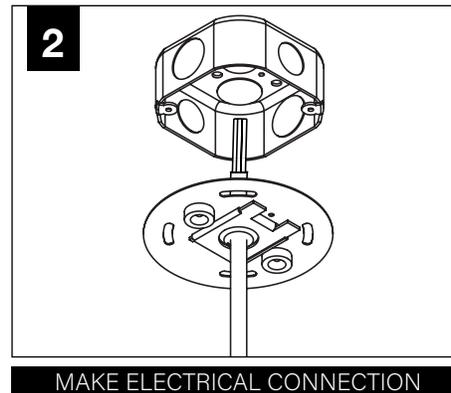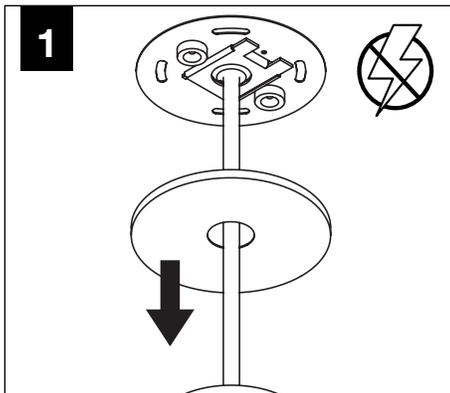






DECORATIVE SHALLOW CANOPY - ALL

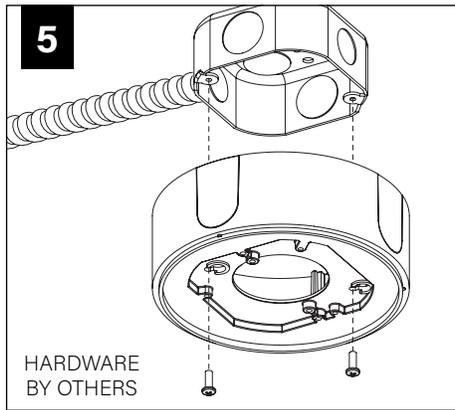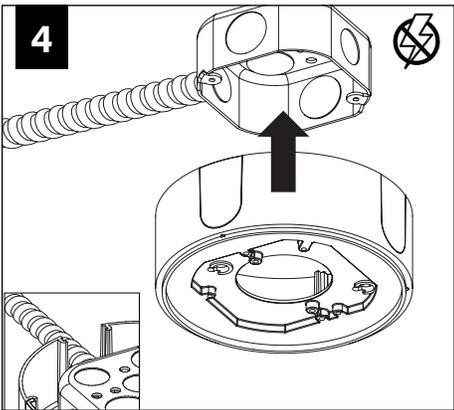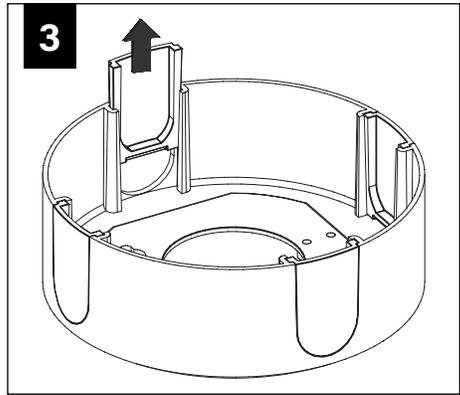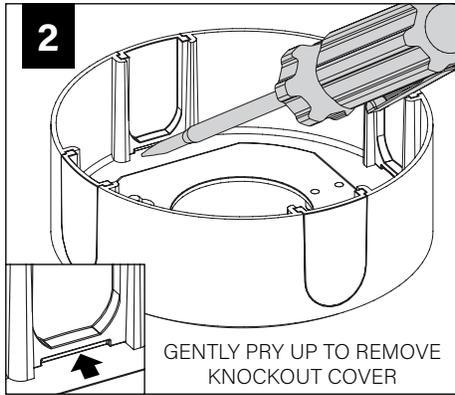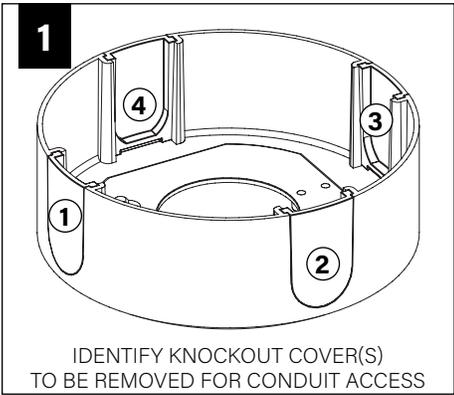

FIXED STEM

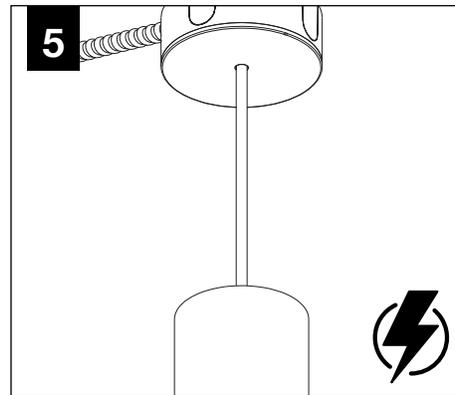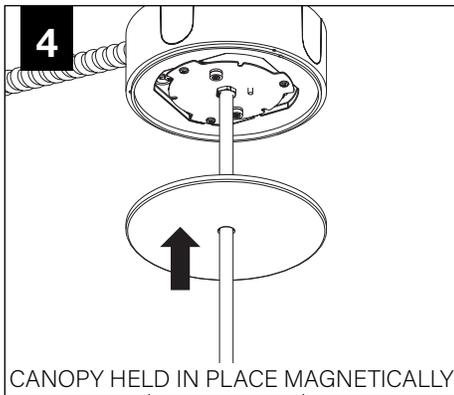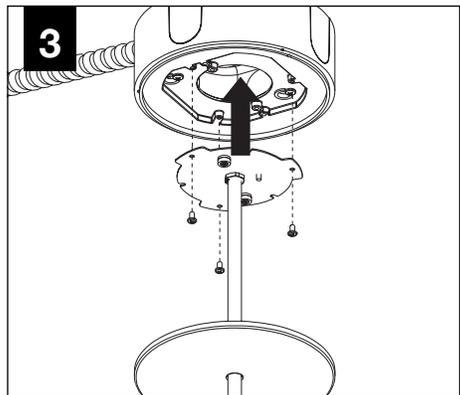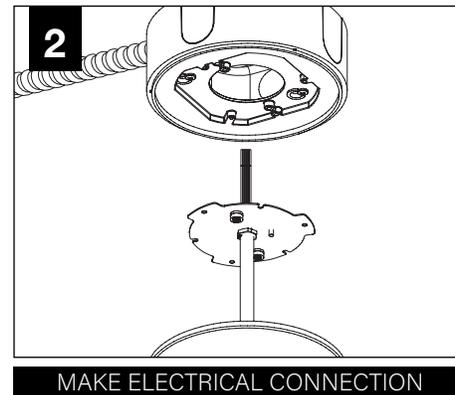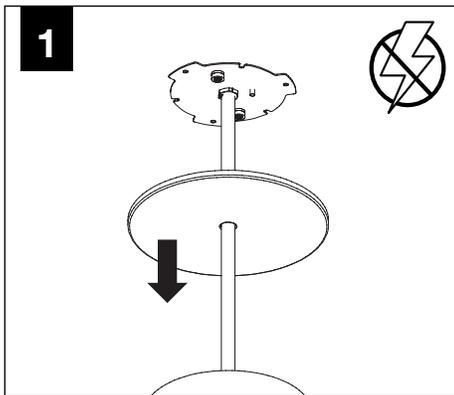

SWIVEL STEM

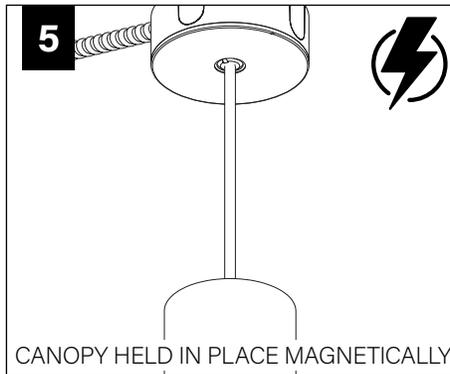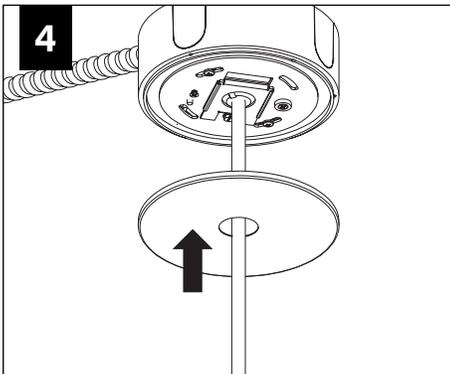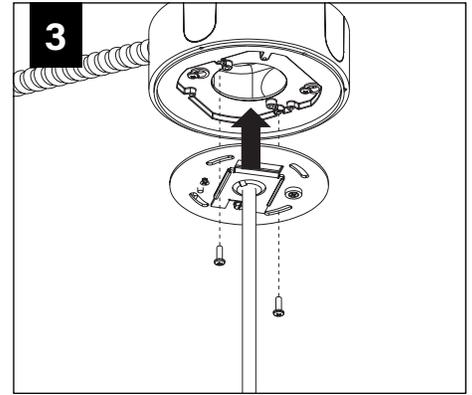
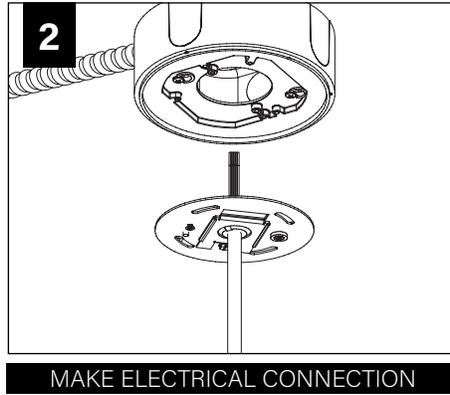
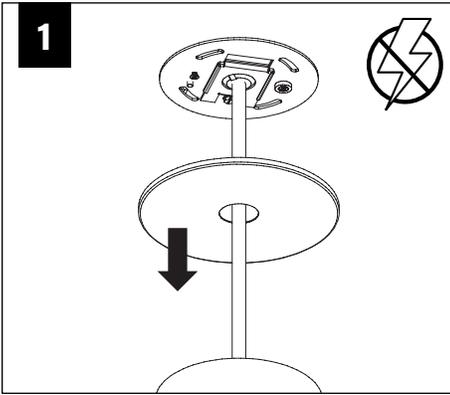


DRIVER SERVICE - ALL





TURN OFF POWER SOURCE PRIOR TO DRIVER SERVICE

FLCY2

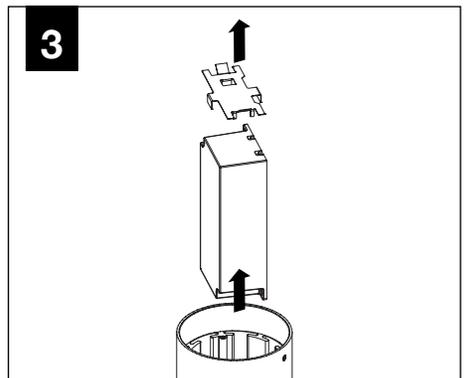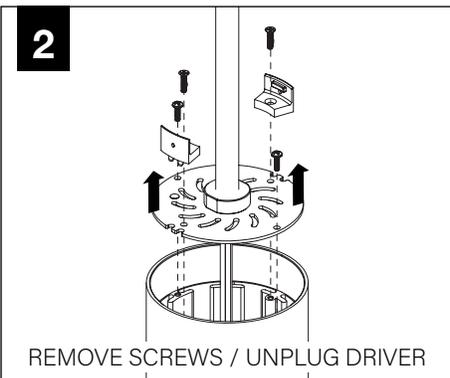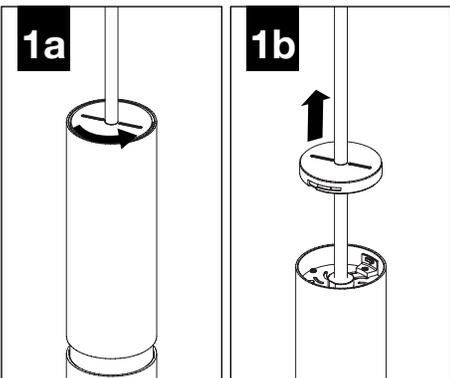

FLCY3 / FLCY4 - SHALLOW CANOPY

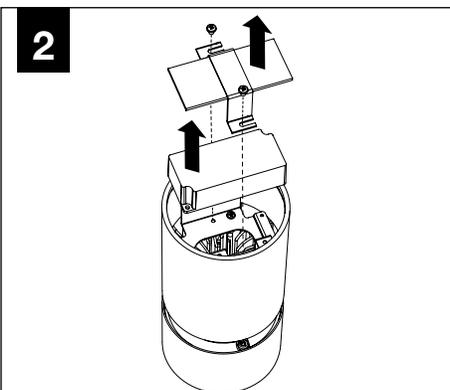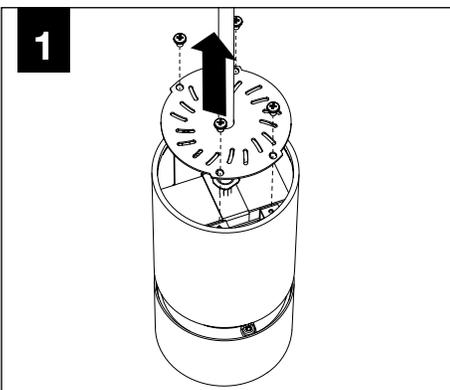


FLCY2 - OPTIC SERVICE


I

DISTRIBUTION KITS INCLUDE AN OPTIC AND REFLECTOR ASSEMBLY.


BOTH ITEMS MUST BE USED TO ACHIEVE SPECIFIED DISTRIBUTION.

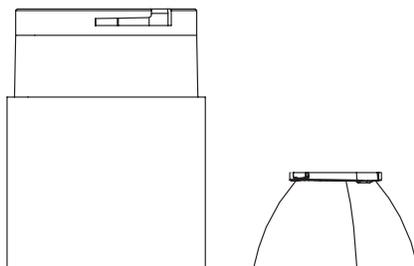


1

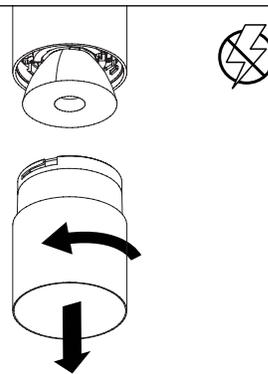


2



3




4




FLCY2 - WALL WASH AIMING


1

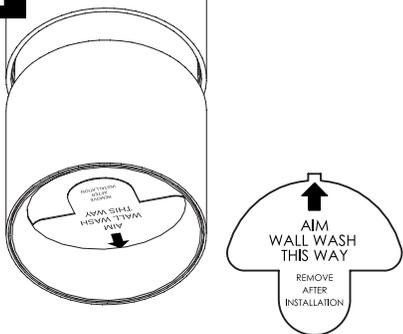

2

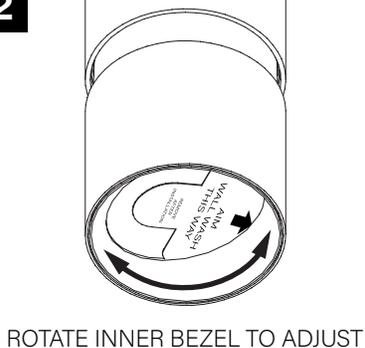


3

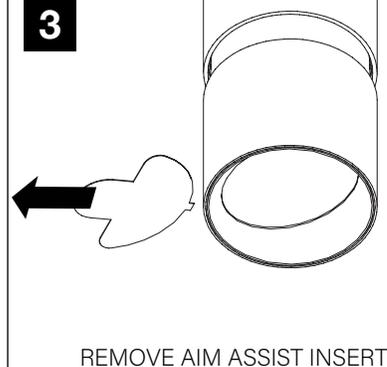


FLCY3 / FLCY4 - OPTIC SERVICE


1





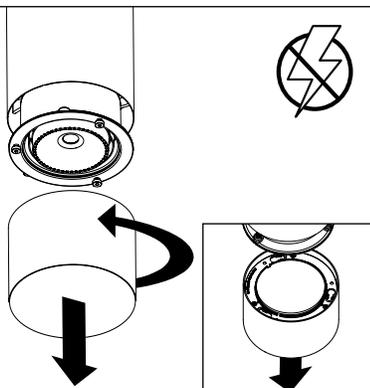


2



3

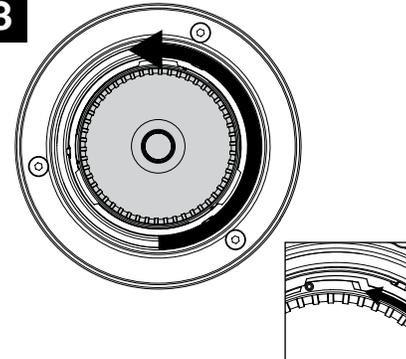

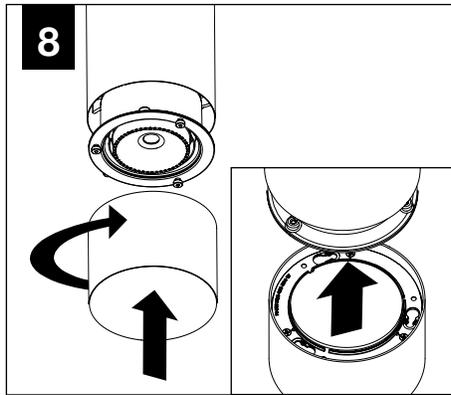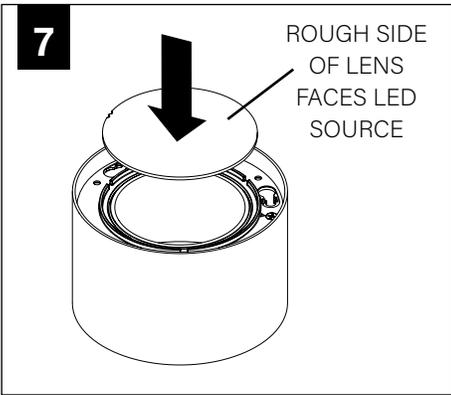
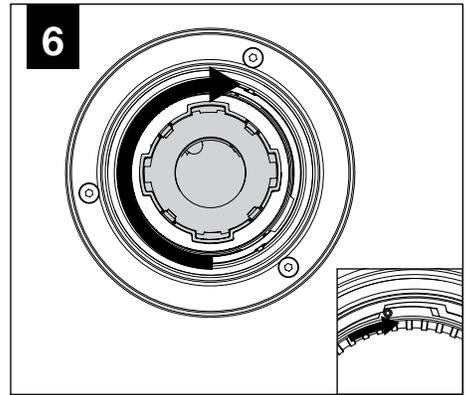
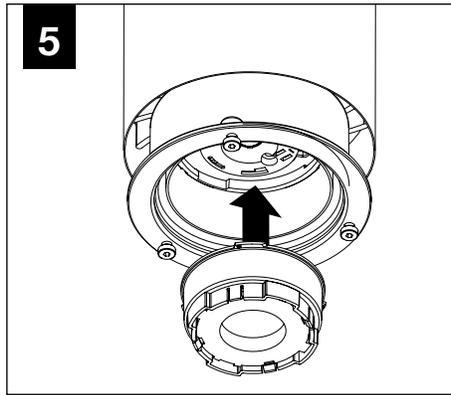
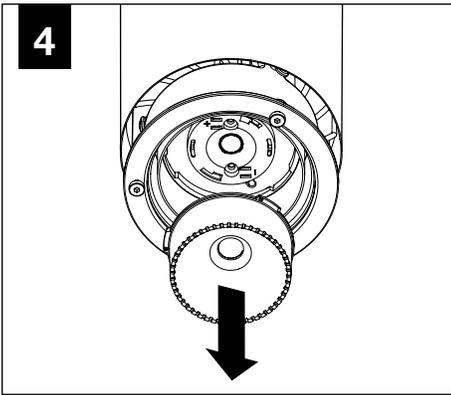


EMERGENCY

I

SEE BATTERY MANUFACTURER INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT:
 2" CYLINDERS - 14.5'
 3.5" CYLINDERS - 16.98'
 4.5" CYLINDERS - 16'

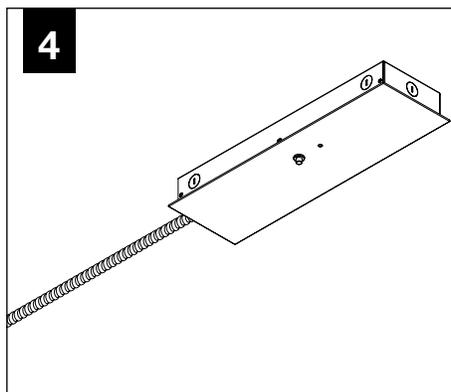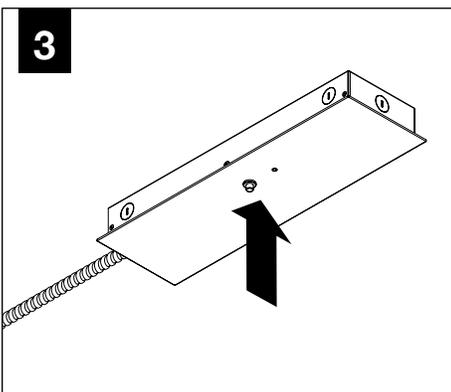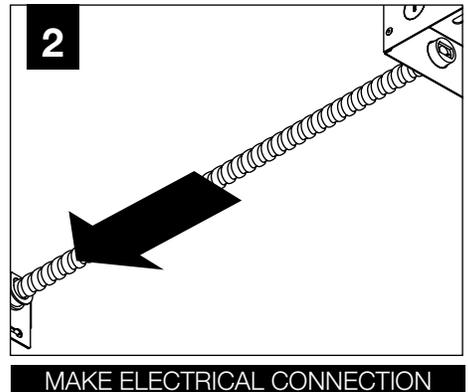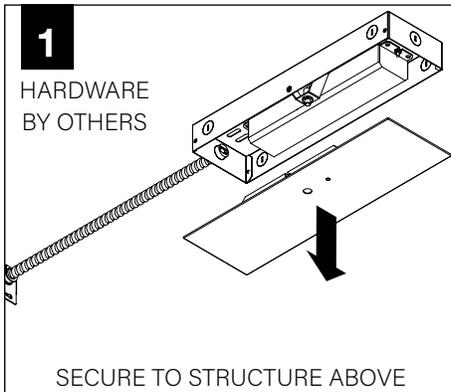

I

PROCEED TO LUMINAIRE INSTALLATION