

# ID+ Cylinder Surface Mount


FLCY3 | FLCY4 - Shallow Canopy



## BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.


## COMPONENT KEY



### SHALLOW CANOPY




J-BOX  
MOUNTING  
BRACKET




SHALLOW  
CANOPY

### DECORATIVE SHALLOW CANOPY



DECORATIVE  
J-BOX  
COVER



SHALLOW  
CANOPY



MOUNTING  
SCREWS  
#72009

## INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL  
INSTRUCTIONS



POWER OFF




POWER ON



LUMINAIRE MUST BE INSTALLED PRIOR TO DRYWALL CEILING.  
ALL GRID LUMINAIRE MUST BE SECURED TO STRUCTURE ABOVE.

## 4" OCTAGONAL J-BOX REQUIRED

J-BOX BY OTHERS

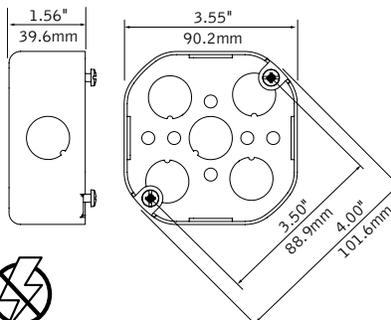

## EMERGENCY




PRIOR TO LUMINAIRE INSTALLATION,  
SEE **PAGE 4** FOR EMERGENCY  
INSTALLATION INSTRUCTIONS.


# SHALLOW CANOPY

## 3.5" CYLINDER

1a

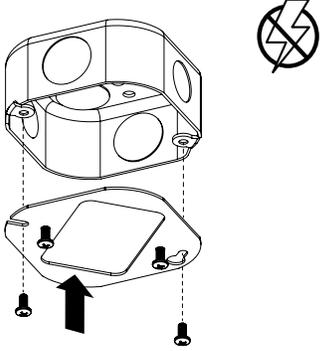


1b

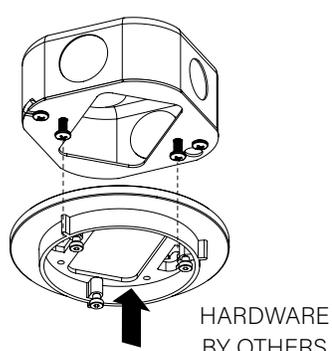

## 4.5" CYLINDER

1

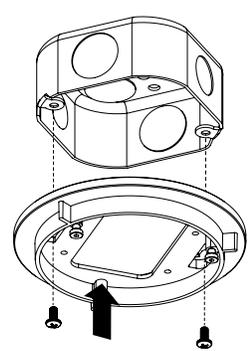


2




MAKE ELECTRICAL CONNECTION

3

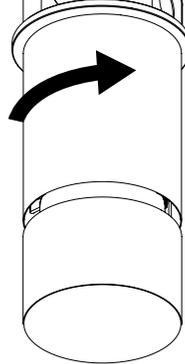


4

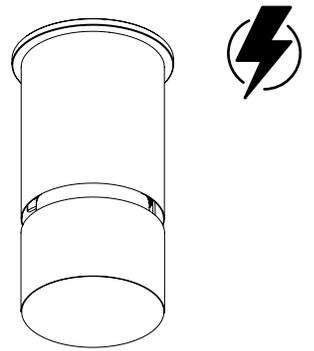


# DECORATIVE SHALLOW CANOPY

1

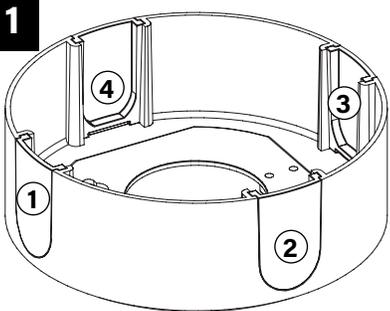


IDENTIFY KNOCKOUT COVER(S)  
TO BE REMOVED FOR CONDUIT ACCESS

2

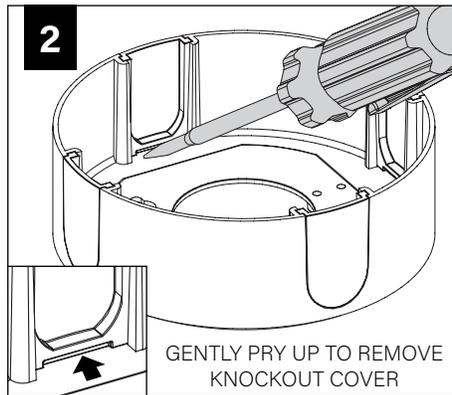


GENTLY PRY UP TO REMOVE  
KNOCKOUT COVER


3

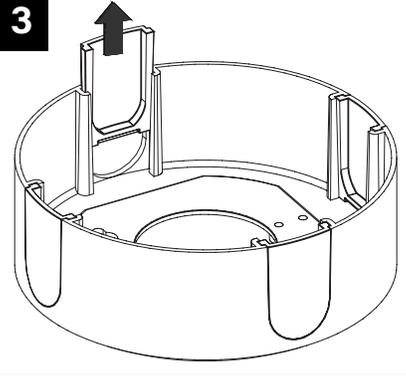

4

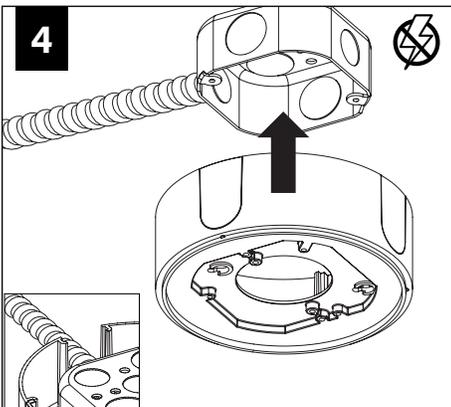



5

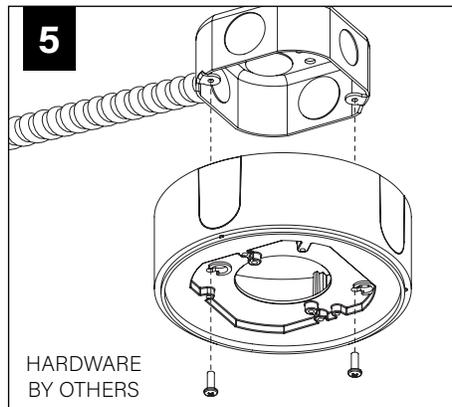



HARDWARE  
BY OTHERS

6





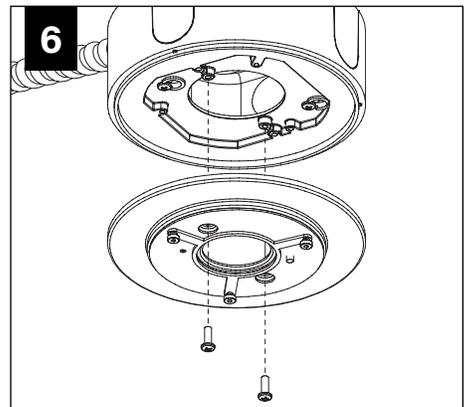


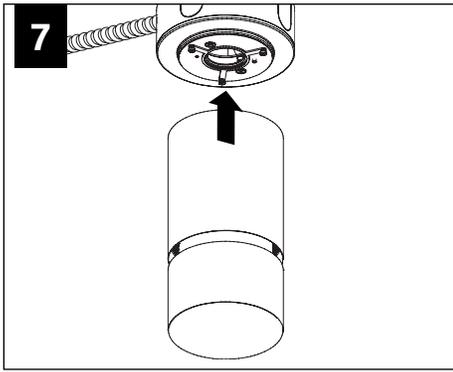




MAKE ELECTRICAL CONNECTION




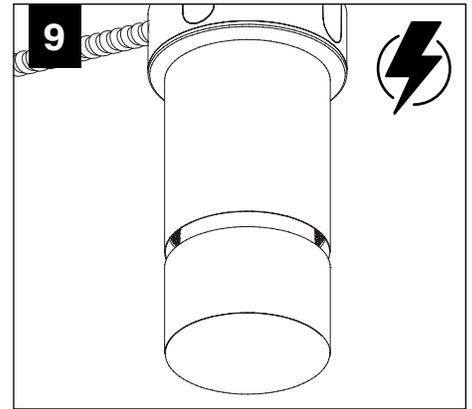
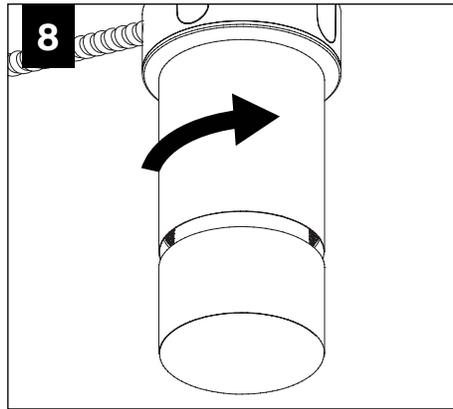


## DRIVER SERVICE

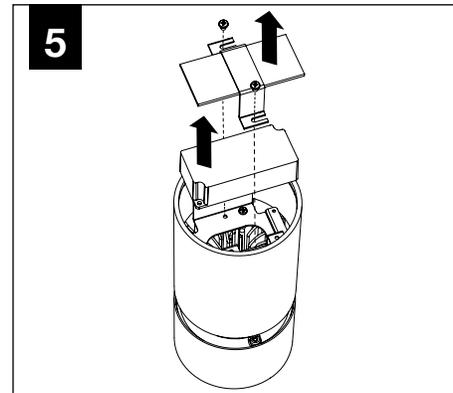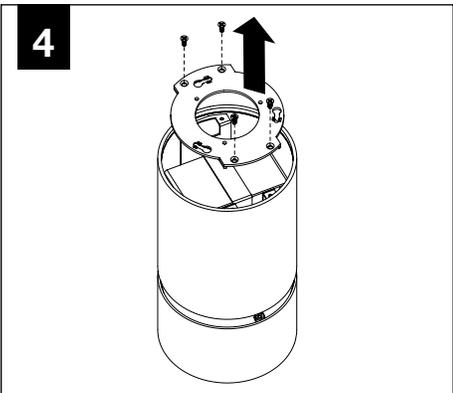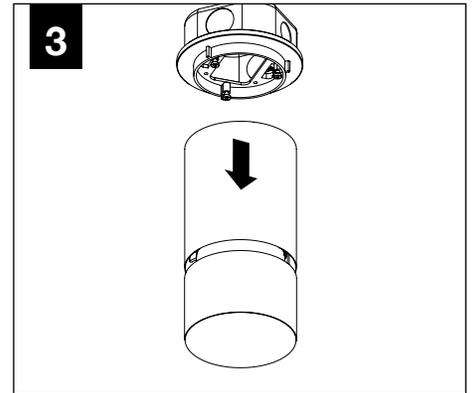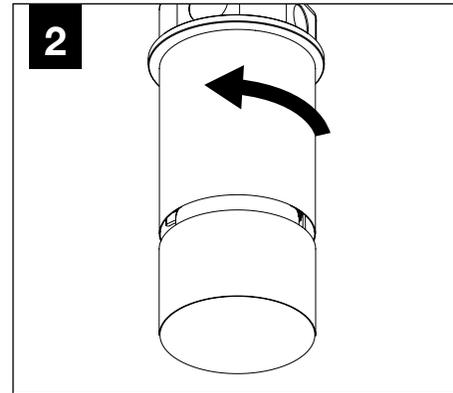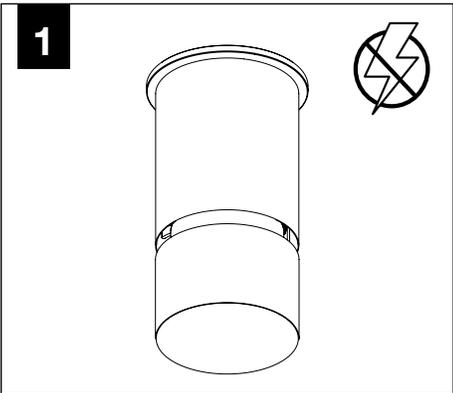

## OPTIC SERVICE

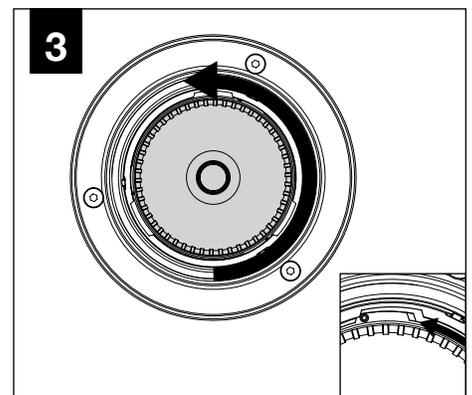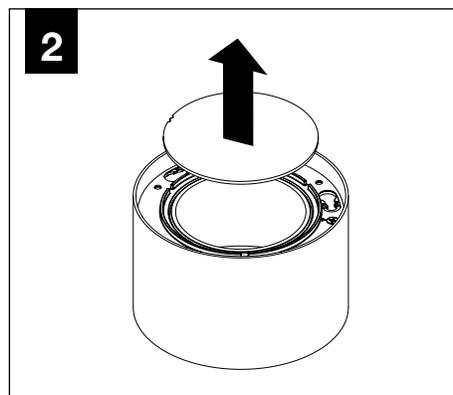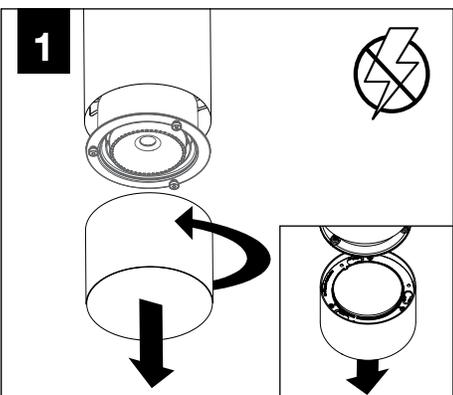

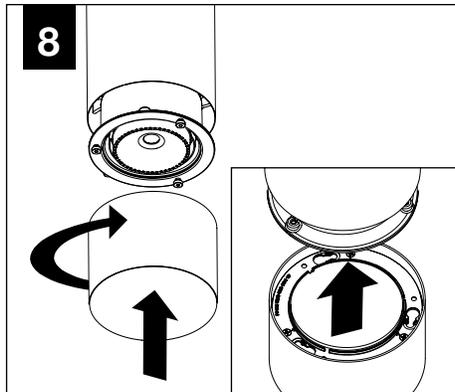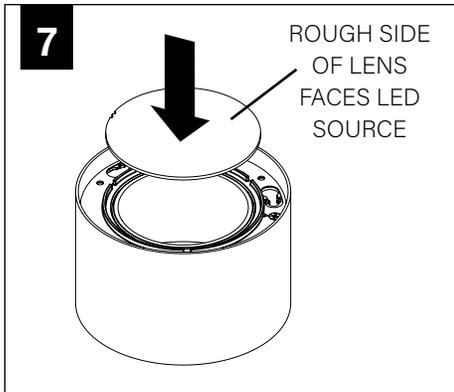
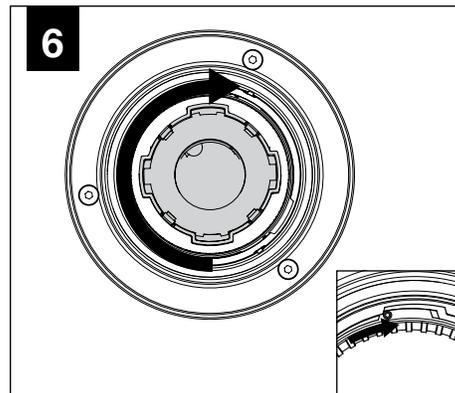
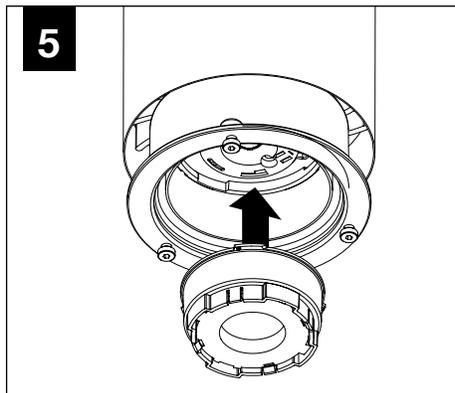
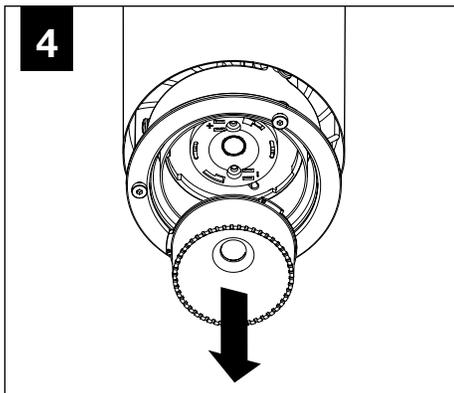


**EMERGENCY**

**I**

SEE BATTERY MANUFACTURER INSTRUCTIONS

**EMERGENCY MAXIMUM MOUNTING HEIGHT:**  
**3.5" CYLINDERS - 16.98'**  
**4.5" CYLINDERS - 16'**

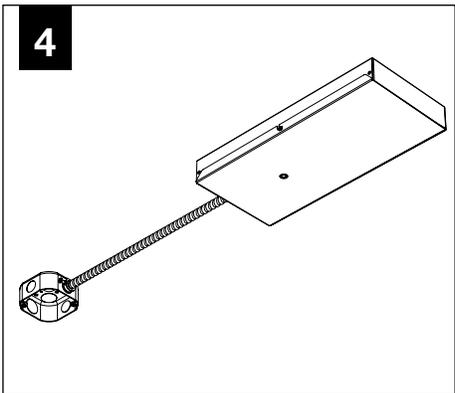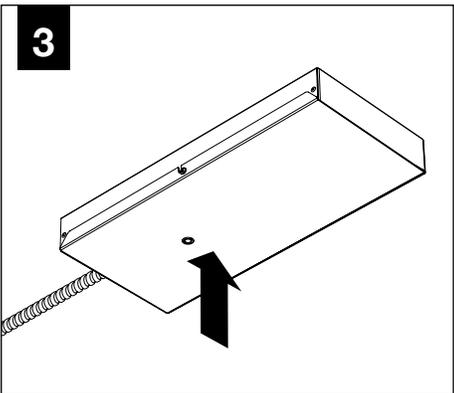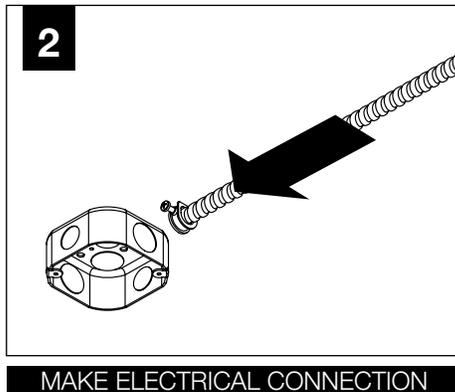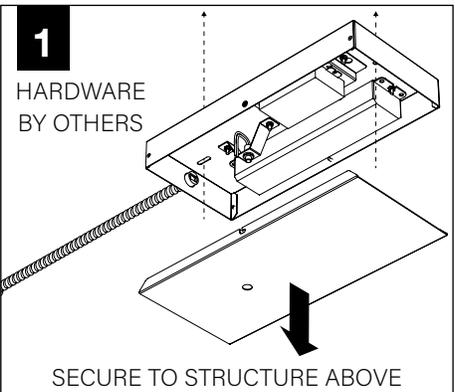

**I**

PROCEED TO LUMINAIRE INSTALLATION