



## IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4DR-TL-L30-835-DIM-UNV-OW-OF-CS\_TBX.IES

### DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002  
 [TEST]GEN FROM BALLABS TEST NO. 20685.0  
 [TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC  
 [ISSUE DATE] 13-DEC-2018  
 [MANUFAC] WILLIAMS INDOOR  
 [OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO  
 [LUMINAIRE] 1 BRIDGELUX V13 LED 4"RND RECESSED CAST HOUSING DOWNLIGHT  
 [MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)  
 [MORE] ADVANCE #XI025C070V054DSM5 @ 490mA  
 [LUMCAT] 4DR-TL-L30-835-DIM-UNV-OW-OF-CS  
 [LAMPCAT] V13 BXRE-35E2000

### CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2985
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	107
Total Luminaire Watts	27.8
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.37 ft (Diameter)
Luminous Width (90-270)	0.37 ft (Diameter)
Luminous Height	0.00 ft

### LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	9052	9052	9052
55	2790	2790	2790
65	344	344	344
75	0	0	0
85	0	0	0

IES INDOOR REPORT  
PHOTOMETRIC FILENAME : 4DR-TL-L30-835-DIM-UNV-OW-OF-CS\_TBX.IES

CANDELA TABULATION

	<u>0</u>
0	2561.807
5	2638.237
10	2717.497
15	2774.111
20	2897.248
25	3157.675
30	2474.054
35	434.516
40	113.229
45	62.276
50	32.553
55	15.569
60	7.077
65	1.415
70	1.415
75	0.000
80	0.000
85	0.000
90	0.000

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 4DR-TL-L30-835-DIM-UNV-OW-OF-CS\_TBX.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1046.91	N.A.	35.10
0-30	2394.66	N.A.	80.20
0-40	2914.36	N.A.	97.60
0-60	2981.71	N.A.	99.90
0-80	2984.87	N.A.	100.00
0-90	2984.87	N.A.	100.00
10-90	2731.11	N.A.	91.50
20-40	1867.44	N.A.	62.60
20-50	1919.1	N.A.	64.30
40-70	70.14	N.A.	2.30
60-80	3.15	N.A.	0.10
70-80	0.37	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2984.87	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	253.76
10-20	793.16
20-30	1347.75
30-40	519.69
40-50	51.66
50-60	15.70
60-70	2.78
70-80	0.37
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : 4DR-TL-L30-835-DIM-UNV-OW-OF-CS\_TBX.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	98	98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	66	61	57	66	60	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52

POLAR GRAPH

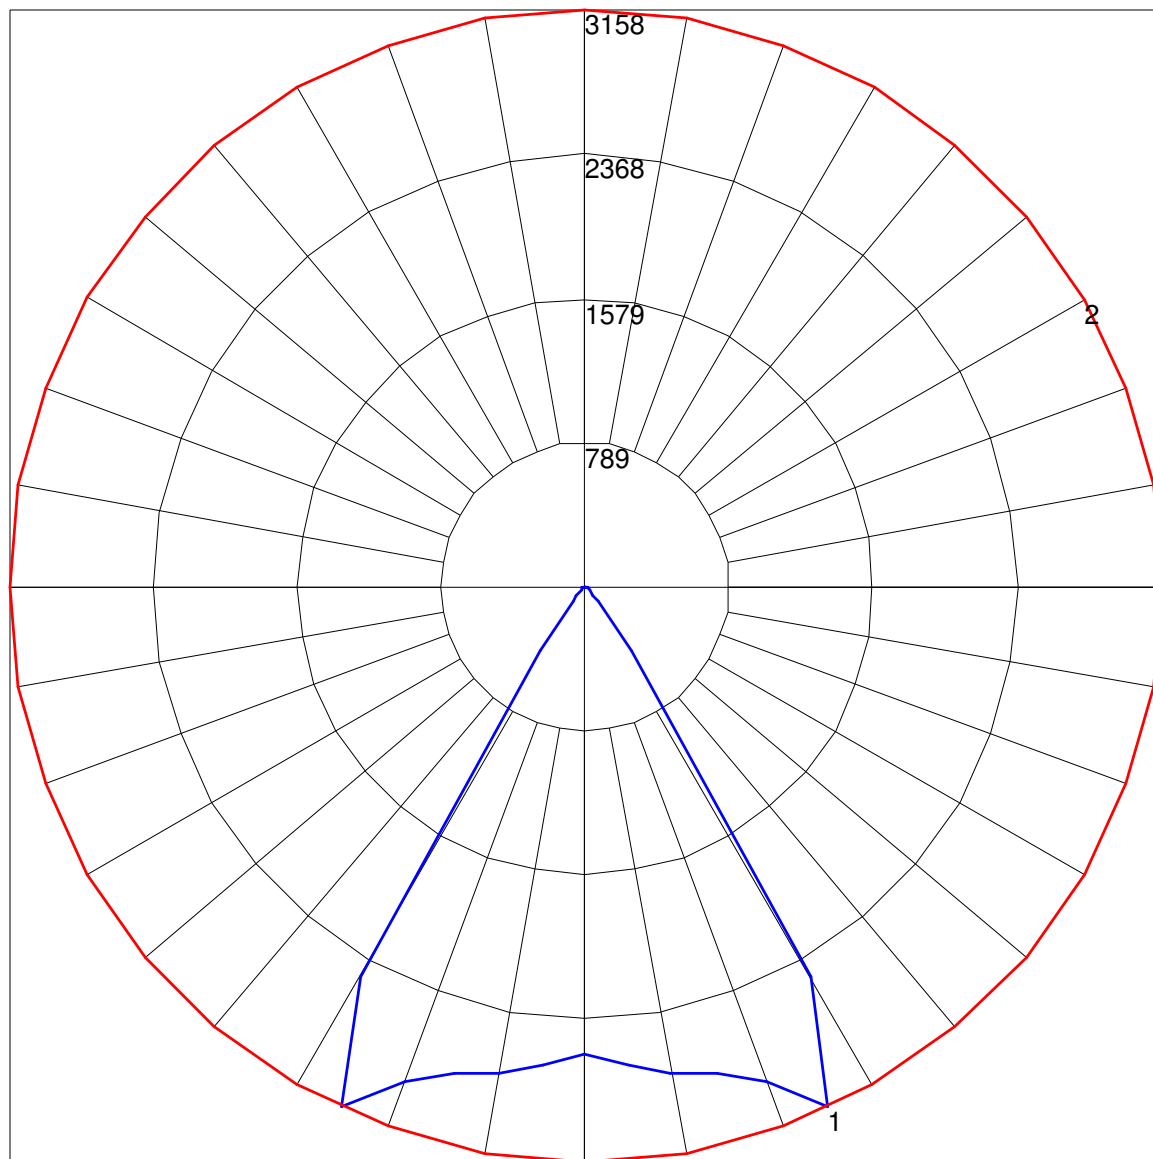

Maximum Candela = 3157.675 Located At Horizontal Angle = 0, Vertical Angle = 25  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)