


BALLABS CERTIFIED TEST REPORT NO.: 20404.0 DATE 05/23/18
PREPARED FOR: H.E. WILLIAMS, INC - CARTHAGE, MO
DESCRIPTION: GEN7 V13 LED 6"SHORT HEATSINK 6"RND ADJ DOWNLIGHT @ 0 TILT
ACRYLIC NARROW TIR OPTIC & 6"WHITE ASYM FLUSH TRIM w/SOLITE
LENS ADVANCE #XI025C070V054DSM5 @ 530mA
CATALOG NBR: 6AR-L20/835-DIM-UNV-L-N-OF-WH (0 DEG TILT)
LAMP TYPE : BXRE-35E2000

0 DEGREE PLANE CONTAINS MAXIMUM CANDLEPOWER

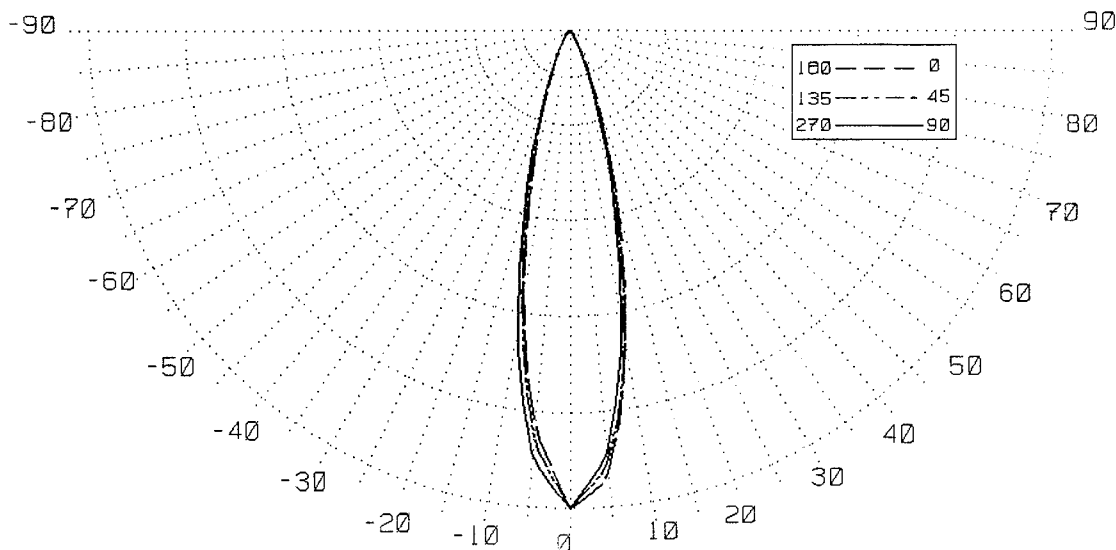

Handwritten signature

NVLAP[®]
TESTING

NVLAP LAB CODE 200921-0

LUMEN SUMMARY							
ZONE	LUMENS	%LAMP	%FIXT	ZONE	LUMENS	%LAMP	%FIXT
0- 30	1755.	NA.	92.1	90-120	0.	NA.	.0
0- 40	1834.	NA.	96.3	90-130	0.	NA.	.0
0- 60	1889.	NA.	99.1	90-150	0.	NA.	.0
0- 90	1906.	NA.	100.0	90-180	0.	NA.	.0
TOTAL LUMINAIRE =				0-180	1906.	NA.	100.0

THIS BALLABS REPORT WITH THE USE OF THE NVLAP LOGO SHALL NOT BE USED BY THIS CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NVLAP, NIST, OR ANY AGENCY OF THE FEDERAL GOVERNMENT.

BALLABS CERTIFIED TEST REPORT NO.: 20404.0 DATE 05/23/18
 PREPARED FOR: H.E. WILLIAMS, INC - CARTHAGE, MO
 DESCRIPTION: GEN7 V13 LED 6"SHORT HEATSINK 6"RND ADJ DOWNLIGHT @ 0 TILT
 ACRYLIC NARROW TIR OPTIC & 6"WHITE ASYM FLUSH TRIM w/SOLITE
 LENS ADVANCE #XI025C070V054DSM5 @ 530mA
 CATALOG NBR: 6AR-L20/835-DIM-UNV-L-N-OF-WH (0 DEG TILT)
 LAMP TYPE : BXRE-35E2000

CANDLEPOWER DISTRIBUTION
 0 DEGREE PLANE CONTAINS MAXIMUM CANDLEPOWER

VERT	HORIZONTAL										LUMENS	
	.0	22.5	45.0	67.5	90.0	112.5	135.0	157.5	180.0	FRONT	BACK	TOTAL
0	8214.	8214.	8214.	8214.	8214.	8214.	8214.	8214.	8214.			
5	7623.	7577.	7473.	7422.	7302.	7132.	6991.	6880.	6754.	358.0	334.4	692.3
10	5516.	5539.	5444.	5223.	5125.	4973.	4699.	4655.	4579.			
15	3238.	3213.	2969.	2812.	2797.	2712.	2595.	2392.	2366.	426.9	361.7	788.6
20	1538.	1517.	1439.	1361.	1330.	1262.	1197.	1121.	1068.			
25	681.	690.	628.	614.	596.	579.	519.	485.	435.	150.9	123.1	274.0
30	297.	296.	284.	264.	259.	253.	235.	220.	199.			
35	134.	133.	131.	128.	129.	131.	120.	113.	105.	41.0	38.3	79.3
40	72.	71.	70.	71.	75.	78.	71.	68.	63.			
45	42.	43.	44.	45.	48.	48.	48.	46.	45.	16.9	18.2	35.1
50	26.	27.	28.	31.	33.	34.	33.	32.	33.			
55	21.	21.	21.	22.	22.	23.	24.	22.	23.	9.6	10.0	19.6
60	16.	14.	15.	16.	17.	19.	17.	16.	16.			
65	12.	12.	11.	12.	13.	13.	12.	12.	11.	6.0	6.2	12.2
70	9.	9.	9.	7.	9.	8.	7.	9.	8.			
75	5.	4.	5.	4.	3.	4.	4.	3.	4.	2.3	2.0	4.3
80	3.	2.	2.	2.	1.	0.	0.	1.	0.			
85	0.	0.	0.	0.	0.	0.	0.	0.	0.	.0	.0	.0
90	0.	0.	0.	0.	0.	0.	0.	0.	0.			

USE .500 FT. AS LENGTH AND .500 FT. AS WIDTH

BALLABS CERTIFIED TEST REPORT NO.: 20404.0 DATE 05/23/18
 PREPARED FOR: H.E. WILLIAMS, INC - CARTHAGE, MO
 DESCRIPTION: GEN7 V13 LED 6"SHORT HEATSINK 6"RND ADJ DOWNLIGHT @ 0 TILT
 ACRYLIC NARROW TIR OPTIC & 6"WHITE ASYM FLUSH TRIM w/SOLITE
 LENS ADVANCE #XI025C070V054DSM5 @ 530mA
 CATALOG NBR: 6AR-L20/835-DIM-UNV-L-N-OF-WH (0 DEG TILT)
 LAMP TYPE : BXRE-35E2000

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

EFFECTIVE FLOOR CAVITY REFLECTANCE=.20

CEILING	.80				.70				.50				.30				.10				.00
WALL	.70	.50	.30	.10	.70	.50	.30	.10	.50	.30	.10	.50	.30	.10	.50	.30	.10	.50	.30	.10	.00
RCR																					
0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	1.00	1.00	1.00
1	1.15	1.13	1.12	1.10	1.13	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.00	1.00	.99	.97	.97	.97	.97
2	1.11	1.07	1.04	1.02	1.09	1.06	1.03	1.01	1.03	1.01	.99	1.00	.98	.97	.97	.96	.95	.93	.92	.90	.90
3	1.08	1.03	.99	.97	1.06	1.02	.98	.96	.99	.97	.94	.97	.95	.93	.95	.93	.92	.90	.88	.87	.87
4	1.04	.99	.95	.92	1.03	.98	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.85	.84	.84	.84
5	1.01	.95	.91	.88	.99	.94	.90	.87	.92	.89	.86	.91	.88	.86	.89	.87	.85	.84	.82	.82	.82
6	.98	.92	.88	.85	.97	.91	.87	.84	.90	.86	.84	.89	.86	.83	.87	.85	.83	.82	.80	.79	.79
7	.95	.89	.85	.82	.94	.88	.84	.82	.87	.84	.81	.86	.83	.81	.85	.82	.80	.78	.77	.77	.77
8	.93	.86	.82	.79	.92	.85	.82	.79	.85	.81	.79	.84	.81	.78	.83	.80	.78	.75	.74	.74	.74
9	.90	.83	.79	.76	.89	.83	.79	.76	.82	.78	.76	.81	.78	.76	.80	.77	.75	.72	.72	.72	.72
10	.87	.80	.76	.73	.86	.80	.76	.73	.79	.75	.73	.78	.75	.73	.78	.75	.73	.72	.72	.72	.72

TESTED IN ACCORDANCE WITH CURRENT IES PROCEDURES

BALLABS CERTIFIED TEST REPORT NO.: 20404.0 DATE 05/23/18
 PREPARED FOR: H.E. WILLIAMS, INC - CARTHAGE, MO
 DESCRIPTION: GEN7 V13 LED 6"SHORT HEATSINK 6"RND ADJ DOWNLIGHT @ 0 TILT
 ACRYLIC NARROW TIR OPTIC & 6"WHITE ASYM FLUSH TRIM w/SOLITE
 LENS ADVANCE #XI025C070V054DSM5 @ 530mA
 CATALOG NBR: 6AR-L20/835-DIM-UNV-L-N-OF-WH (0 DEG TILT)
 LAMP TYPE : BXRE-35E2000

ELECTRICAL CHARACTERISTICS 119.99V .1801A 21.3260W

LUMINOUS EFFICACY (LUMENS / WATTS) = 89.3

TESTED IN ACCORDANCE WITH CURRENT IES STANDARDS
 UTILIZING ABSOLUTE PHOTOMETRY PER LM-79-08

