



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6AR-L10-835-DIM-UNV-AM-OF-WH_0 DEGREE TILT.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from BALLABS TEST NO. 20410.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUEDATE] 24-JUL-2020

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO

[LUMINAIRE] GEN7 V13 LED 6"SHORT HEATSINK 6"RND ADJ DOWNLIGHT @ 0 TILT

[MORE] ACRYLIC MED TIR OPTIC & 6"WHITE ASYM TRIM w/ANGLED SOLITE

[MORE] LENS ADVANCE #XI025C070V054DSM5 @ 530mA

[LUMCAT] 6AR-L10-835-DIM-UNV-AM-OF-WH_0 DEGREE TILT

[LAMPCAT] BXRE-35E2000

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] Indoor, Classroom, Industrial, Office, Direct, Downlight

[_SEARCH_MOUNTING] Recessed

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	888
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	85
Total Luminaire Watts	10.5
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.56
Spacing Criterion (90-270)	0.54
Spacing Criterion (Diagonal)	0.52
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.50 ft (Diameter)
Luminous Width (90-270)	0.50 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1627	1704	1820
55	1003	1098	1050
65	1037	972	518
75	1164	846	317
85	314	0	0

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6AR-L10-835-DIM-UNV-AM-OF-WH_0 DEGREE TILT.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
0	2615.0	2615.0	2615.0	2615.0	2615.0	2615.0	2615.0	2615.0	2615.0
5	2543.5	2546.0	2535.0	2519.5	2472.5	2446.0	2408.0	2351.5	2339.0
10	2201.5	2181.0	2184.0	2166.5	2124.0	2029.5	1939.5	1862.0	1794.0
15	1545.5	1568.0	1561.0	1527.5	1452.5	1351.0	1258.0	1181.5	1137.0
20	835.0	876.5	877.5	827.5	772.0	691.0	661.5	634.0	610.0
25	399.0	418.0	397.5	379.5	359.0	332.5	328.5	320.5	319.0
30	179.5	190.0	180.0	165.5	162.0	166.5	165.5	166.5	168.0
35	86.5	87.5	85.0	79.5	76.5	78.0	83.5	88.5	87.0
40	42.5	45.0	44.0	40.5	41.0	41.0	45.0	47.0	47.0
45	21.0	22.0	22.0	22.0	23.5	24.5	26.0	27.0	27.0
50	12.5	13.5	14.0	15.5	16.0	16.0	16.0	18.0	18.0
55	10.5	11.0	11.5	12.0	11.0	10.5	10.5	11.0	12.0
60	9.5	9.5	10.5	9.5	8.5	7.0	6.0	6.5	6.5
65	8.0	7.5	7.5	6.5	4.0	3.0	3.0	1.5	1.5
70	7.0	7.5	7.0	4.5	3.0	1.5	1.5	1.0	1.5
75	5.5	4.5	4.0	2.5	1.5	0.5	0.0	0.0	0.5
80	2.0	2.0	1.5	0.5	0.0	0.0	0.0	0.0	0.0
85	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6AR-L10-835-DIM-UNV-AM-OF-WH_0 DEGREE TILT.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	606.45	N.A.	68.30
0-30	791.34	N.A.	89.10
0-40	849.93	N.A.	95.70
0-60	880.62	N.A.	99.10
0-80	888.12	N.A.	100.00
0-90	888.31	N.A.	100.00
10-90	665.69	N.A.	74.90
20-40	243.48	N.A.	27.40
20-50	263.92	N.A.	29.70
40-70	35.98	N.A.	4.10
60-80	7.50	N.A.	0.80
70-80	2.21	N.A.	0.20
80-90	0.19	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	888.31	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	222.62
10-20	383.83
20-30	184.88
30-40	58.60
40-50	20.44
50-60	10.25
60-70	5.29
70-80	2.21
80-90	0.19
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6AR-L10-835-DIM-UNV-AM-OF-WH_0 DEGREE TILT.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	60	60	60	60	58	58	58	58	56	56	56	53	53	53	51	51	51	50
1	57	56	55	54	56	55	54	53	53	52	52	51	51	50	49	49	49	48
2	55	53	51	50	54	52	51	49	51	49	48	49	48	47	48	47	46	45
3	53	50	48	47	52	50	48	46	48	47	45	47	46	45	46	45	44	43
4	51	48	46	44	50	47	45	44	46	45	43	45	44	43	44	43	42	42
5	49	46	43	42	48	45	43	41	44	43	41	44	42	41	43	42	40	40
6	47	44	41	40	47	43	41	40	43	41	39	42	40	39	41	40	39	38
7	46	42	40	38	45	42	39	38	41	39	38	41	39	37	40	39	37	37
8	44	40	38	36	44	40	38	36	40	38	36	39	37	36	39	37	36	35
9	43	39	37	35	42	39	36	35	38	36	35	38	36	35	38	36	35	34
10	41	38	35	34	41	37	35	34	37	35	34	37	35	34	36	35	33	33

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6AR-L10-835-DIM-UNV-AM-OF-WH_0 DEGREE TILT.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise


X=2H	Y=2H	5.5	6.4	5.9	6.8	7.1	5.2	6.1	5.5	6.4	6.7
	3H	7.7	8.6	8.1	8.9	9.3	5.7	6.6	6.1	6.9	7.3
	4H	8.6	9.4	9.0	9.7	10.1	5.8	6.6	6.3	7.0	7.3
	6H	9.0	9.7	9.4	10.0	10.4	5.8	6.5	6.2	6.8	7.2
	8H	9.0	9.6	9.4	10.0	10.5	5.7	6.4	6.1	6.7	7.2
	12H	9.0	9.6	9.4	10.0	10.4	5.6	6.3	6.1	6.7	7.1

UGR Viewed Endwise

4H	2H	6.0	6.8	6.4	7.1	7.5	5.4	6.2	5.8	6.5	6.9
	3H	8.5	9.2	9.0	9.6	10.0	6.2	6.9	6.7	7.3	7.7
	4H	9.4	10.0	9.9	10.4	10.9	6.4	6.9	6.8	7.4	7.8
	6H	9.9	10.3	10.3	10.8	11.3	6.3	6.8	6.8	7.3	7.7
	8H	9.9	10.3	10.4	10.8	11.3	6.3	6.7	6.7	7.1	7.6
	12H	9.9	10.2	10.4	10.7	11.2	6.2	6.6	6.7	7.1	7.5
8H	4H	9.5	10.0	10.0	10.4	10.9	6.6	7.0	7.0	7.4	7.9
	6H	10.0	10.3	10.5	10.8	11.3	6.5	6.9	7.0	7.4	7.9
	8H	10.0	10.4	10.6	10.9	11.4	6.4	6.8	7.0	7.3	7.8
	12H	10.1	10.3	10.6	10.8	11.4	6.4	6.7	6.9	7.2	7.7
12H	4H	9.5	9.8	9.9	10.3	10.8	6.5	6.9	7.0	7.4	7.9
	6H	9.9	10.3	10.5	10.7	11.3	6.5	6.8	7.0	7.3	7.8
	8H	10.0	10.3	10.6	10.8	11.4	6.5	6.7	7.0	7.2	7.8

Maximum UGR = 11.4

POLAR GRAPH

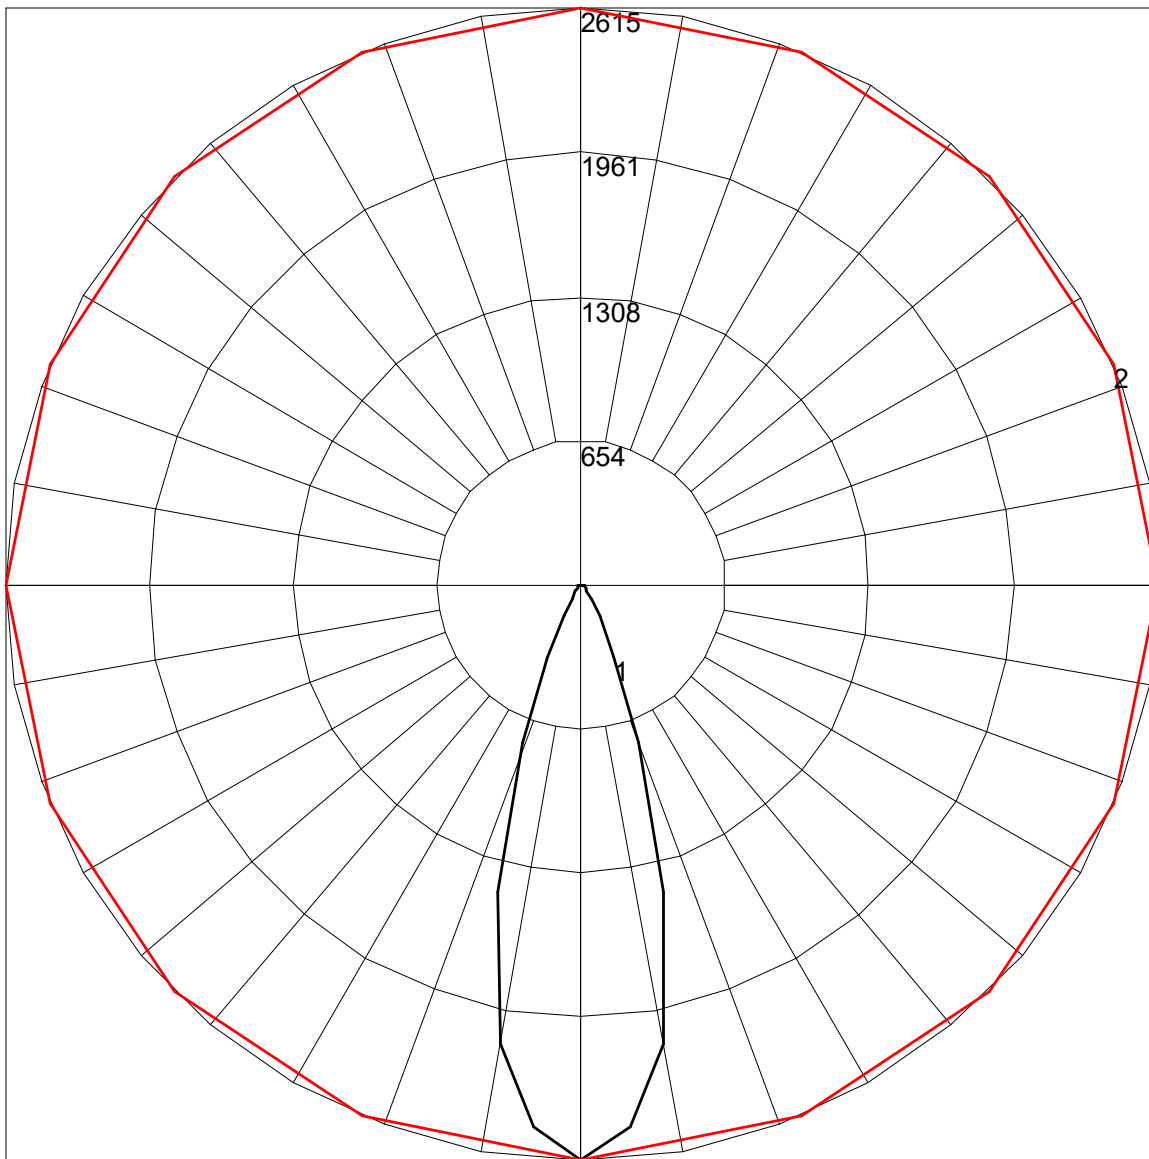

Maximum Candela = 2615 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)