



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from UL #13537338.03 and #12326812.10

[TESTLAB]

[ISSUE DATE] 17-FEB-2021

[MANUFAC] WILLIAMS INDOOR

[MORE] H.E. WILLIAMS, INC. - CARTHAGE, MO

[LUMCAT] 8CRDI-TL-L20-835U-L20-835D-xxx-DIM1-UNV-OW-CSU-LN-WHD-WM

[MORE]

[LUMINAIRE] White formed aluminum housing, wide distribution reflector

[MORE] trim, clear uplight glass lens enclosure, narrow distr flush prismatic lens trim down

[LAMP] Two white LEDs (one up/one down)

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] INDOOR, DIRECT, INDIRECT

[_SEARCH_MOUNTING] WALL

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3649
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	96
Total Luminaire Watts	37.9871
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.65 ft (Diameter)
Luminous Width (90-270)	0.65 ft (Diameter)
Luminous Height	2.17 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	658	658	658
55	358	358	358
65	203	203	203
75	100	100	100
85	22	22	22

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES

CANDELA TABULATION

	<u>0</u>
0.0	6867.000
0.5	6861.000
1.0	6841.000
1.5	6806.000
2.0	6758.000
2.5	6697.000
3.0	6624.000
3.5	6538.000
4.0	6440.000
4.5	6332.000
5.0	6215.000
5.5	6087.000
6.0	5949.000
6.5	5802.000
7.0	5646.000
7.5	5482.000
8.0	5309.000
8.5	5131.000
9.0	4949.000
9.5	4761.000
10.0	4571.000
10.5	4378.000
11.0	4182.000
11.5	3985.000
12.0	3788.000
12.5	3593.000
13.0	3400.000
13.5	3210.000
14.0	3024.000
14.5	2843.000
15.0	2669.000
15.5	2502.000
16.0	2343.000
16.5	2192.000
17.0	2048.000
17.5	1911.000
18.0	1782.000
18.5	1662.000
19.0	1549.000
19.5	1444.000
20.0	1344.000
20.5	1249.000
21.0	1161.000
21.5	1079.000
22.0	1001.000
22.5	928.700
23.0	860.900
23.5	798.100
24.0	739.300
24.5	684.800
25.0	634.400
25.5	587.700
26.0	544.500
26.5	504.700

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

27.0	468.200
27.5	434.600
28.0	403.800
28.5	375.700
29.0	349.800
29.5	326.000
30.0	304.200
30.5	284.300
31.0	266.000
31.5	249.300
32.0	233.900
32.5	219.800
33.0	206.800
33.5	194.900
34.0	183.900
34.5	173.900
35.0	164.600
35.5	156.100
36.0	148.300
36.5	141.000
37.0	134.400
37.5	128.300
38.0	122.700
38.5	117.400
39.0	112.600
39.5	108.100
40.0	104.000
40.5	100.100
41.0	96.600
41.5	93.200
42.0	90.100
42.5	87.200
43.0	84.400
43.5	81.800
44.0	79.300
44.5	77.000
45.0	74.800
45.5	72.700
46.0	70.700
46.5	68.700
47.0	66.900
47.5	65.100
48.0	63.300
48.5	61.600
49.0	60.000
49.5	58.500
50.0	57.000
50.5	55.500
51.0	54.100
51.5	52.800
52.0	51.500
52.5	50.200
53.0	48.900
53.5	47.800
54.0	46.600
54.5	45.500

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

55.0	44.400
55.5	43.300
56.0	42.200
56.5	41.200
57.0	40.200
57.5	39.300
58.0	38.300
58.5	37.400
59.0	36.500
59.5	35.500
60.0	34.700
60.5	33.800
61.0	32.900
61.5	32.100
62.0	31.300
62.5	30.500
63.0	29.700
63.5	28.900
64.0	28.100
64.5	27.300
65.0	26.600
65.5	25.800
66.0	25.100
66.5	24.300
67.0	23.600
67.5	22.900
68.0	22.200
68.5	21.500
69.0	20.800
69.5	20.100
70.0	19.400
70.5	18.800
71.0	18.100
71.5	17.500
72.0	16.900
72.5	16.200
73.0	15.600
73.5	15.000
74.0	14.400
74.5	13.800
75.0	13.300
75.5	12.700
76.0	12.100
76.5	11.500
77.0	11.000
77.5	10.400
78.0	9.900
78.5	9.400
79.0	8.800
79.5	8.300
80.0	7.800
80.5	7.300
81.0	6.800
81.5	6.300
82.0	5.800
82.5	5.300

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

83.0	4.800
83.5	4.300
84.0	3.900
84.5	3.400
85.0	2.900
85.5	2.500
86.0	2.100
86.5	1.700
87.0	1.400
87.5	1.100
88.0	0.800
88.5	0.600
89.0	0.500
89.5	0.300
90.0	3.778
90.5	3.607
91.0	3.635
91.5	3.664
92.0	3.720
92.5	3.749
93.0	3.806
93.5	3.862
94.0	3.919
94.5	4.004
95.0	4.061
95.5	4.146
96.0	4.203
96.5	4.288
97.0	4.374
97.5	4.459
98.0	4.544
98.5	4.629
99.0	4.714
99.5	4.800
100.0	4.913
100.5	5.027
101.0	5.112
101.5	5.254
102.0	5.311
102.5	5.453
103.0	5.566
103.5	5.680
104.0	5.822
104.5	5.964
105.0	6.078
105.5	6.220
106.0	6.362
106.5	6.532
107.0	6.674
107.5	6.816
108.0	6.986
108.5	7.157
109.0	7.299
109.5	7.469
110.0	7.668
110.5	7.867

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

111.0	8.066
111.5	8.293
112.0	8.520
112.5	8.719
113.0	8.974
113.5	9.230
114.0	9.486
114.5	9.770
115.0	10.054
115.5	10.366
116.0	10.678
116.5	11.019
117.0	11.360
117.5	11.729
118.0	12.127
118.5	12.524
119.0	12.979
119.5	13.405
120.0	13.916
120.5	14.427
121.0	14.967
121.5	15.563
122.0	16.216
122.5	16.898
123.0	17.636
123.5	18.403
124.0	19.255
124.5	20.136
125.0	21.073
125.5	22.095
126.0	23.146
126.5	24.367
127.0	25.617
127.5	26.866
128.0	28.088
128.5	29.366
129.0	30.729
129.5	32.120
130.0	33.484
130.5	34.904
131.0	36.352
131.5	37.886
132.0	39.561
132.5	41.350
133.0	43.338
133.5	45.412
134.0	47.627
134.5	50.183
135.0	53.335
135.5	57.226
136.0	62.224
136.5	69.012
137.0	78.469
137.5	91.533
138.0	108.204
138.5	128.340

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

139.0	152.224
139.5	180.170
140.0	212.460
140.5	248.869
141.0	290.248
141.5	336.824
142.0	387.944
142.5	443.608
143.0	503.532
143.5	566.012
144.0	629.912
144.5	692.960
145.0	755.156
145.5	817.636
146.0	880.400
146.5	943.164
147.0	1006.496
147.5	1068.692
148.0	1128.616
148.5	1185.416
149.0	1239.660
149.5	1290.212
150.0	1336.504
150.5	1377.968
151.0	1415.456
151.5	1448.968
152.0	1478.504
152.5	1504.348
153.0	1526.216
153.5	1545.528
154.0	1561.716
154.5	1574.780
155.0	1585.004
155.5	1592.388
156.0	1596.648
156.5	1597.216
157.0	1594.660
157.5	1590.684
158.0	1584.720
158.5	1577.904
159.0	1569.952
159.5	1561.716
160.0	1552.912
160.5	1544.108
161.0	1534.736
161.5	1525.080
162.0	1515.708
162.5	1506.904
163.0	1497.816
163.5	1489.864
164.0	1482.480
164.5	1475.664
165.0	1469.700
165.5	1463.168
166.0	1457.204
166.5	1450.956

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

167.0	1444.992
167.5	1439.028
168.0	1433.064
168.5	1427.384
169.0	1421.420
169.5	1415.172
170.0	1408.356
170.5	1400.688
171.0	1392.168
171.5	1382.512
172.0	1370.300
172.5	1357.236
173.0	1343.320
173.5	1328.836
174.0	1314.068
174.5	1299.300
175.0	1285.384
175.5	1271.752
176.0	1258.404
176.5	1245.056
177.0	1232.276
177.5	1220.632
178.0	1210.976
178.5	1203.024
179.0	1197.060
179.5	1193.368
180.0	1192.516

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1275.16	N.A.	34.90
0-30	1583.52	N.A.	43.40
0-40	1692.54	N.A.	46.40
0-60	1791.4	N.A.	49.10
0-80	1831.92	N.A.	50.20
0-90	1835.6	N.A.	50.30
10-90	1295.85	N.A.	35.50
20-40	417.38	N.A.	11.40
20-50	476.21	N.A.	13.10
40-70	125.29	N.A.	3.40
60-80	40.52	N.A.	1.10
70-80	14.09	N.A.	0.40
80-90	3.68	N.A.	0.10
90-110	11.00	N.A.	0.30
90-120	21.18	N.A.	0.60
90-130	40.77	N.A.	1.10
90-150	558.11	N.A.	15.30
90-180	1813.51	N.A.	49.70
110-180	1802.51	N.A.	49.40
0-180	3649.11	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	539.74
10-20	735.41
20-30	308.36
30-40	109.02
40-50	58.83
50-60	40.04
60-70	26.43
70-80	14.09
80-90	3.68
90-100	4.50
100-110	6.50
110-120	10.18
120-130	19.59
130-140	55.74
140-150	461.60
150-160	708.42
160-170	419.91
170-180	127.07

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	56	56	56	50
1	101	97	94	92	93	90	88	86	77	76	74	65	64	63	54	53	53	48
2	94	89	84	81	87	83	79	76	72	69	67	61	60	58	52	51	50	45
3	89	82	76	72	82	76	72	68	67	64	61	58	56	54	49	48	47	43
4	84	76	70	65	78	71	66	62	63	59	56	55	52	50	47	46	45	41
5	79	70	64	60	74	66	61	57	59	55	52	52	49	47	46	44	43	40
6	75	66	60	55	70	62	57	53	56	52	49	50	47	45	44	42	41	38
7	71	62	56	51	67	59	53	50	53	49	46	47	45	43	42	40	39	37
8	68	58	52	48	64	55	50	47	50	46	44	46	43	41	41	39	38	36
9	64	55	49	45	61	53	48	44	48	44	41	44	41	39	40	38	36	34
10	62	52	47	43	58	50	45	42	46	42	40	42	39	37	38	36	35	33

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	3H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	4H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	6H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	8H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	12H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6

UGR Viewed Endwise


4H	2H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	3H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	4H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	6H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	8H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	12H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
8H	4H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	6H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	8H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	12H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
12H	4H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	6H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6
	8H	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6	4.6

Maximum UGR = 4.6

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-LN-WHD-WM_.IES

POLAR GRAPH

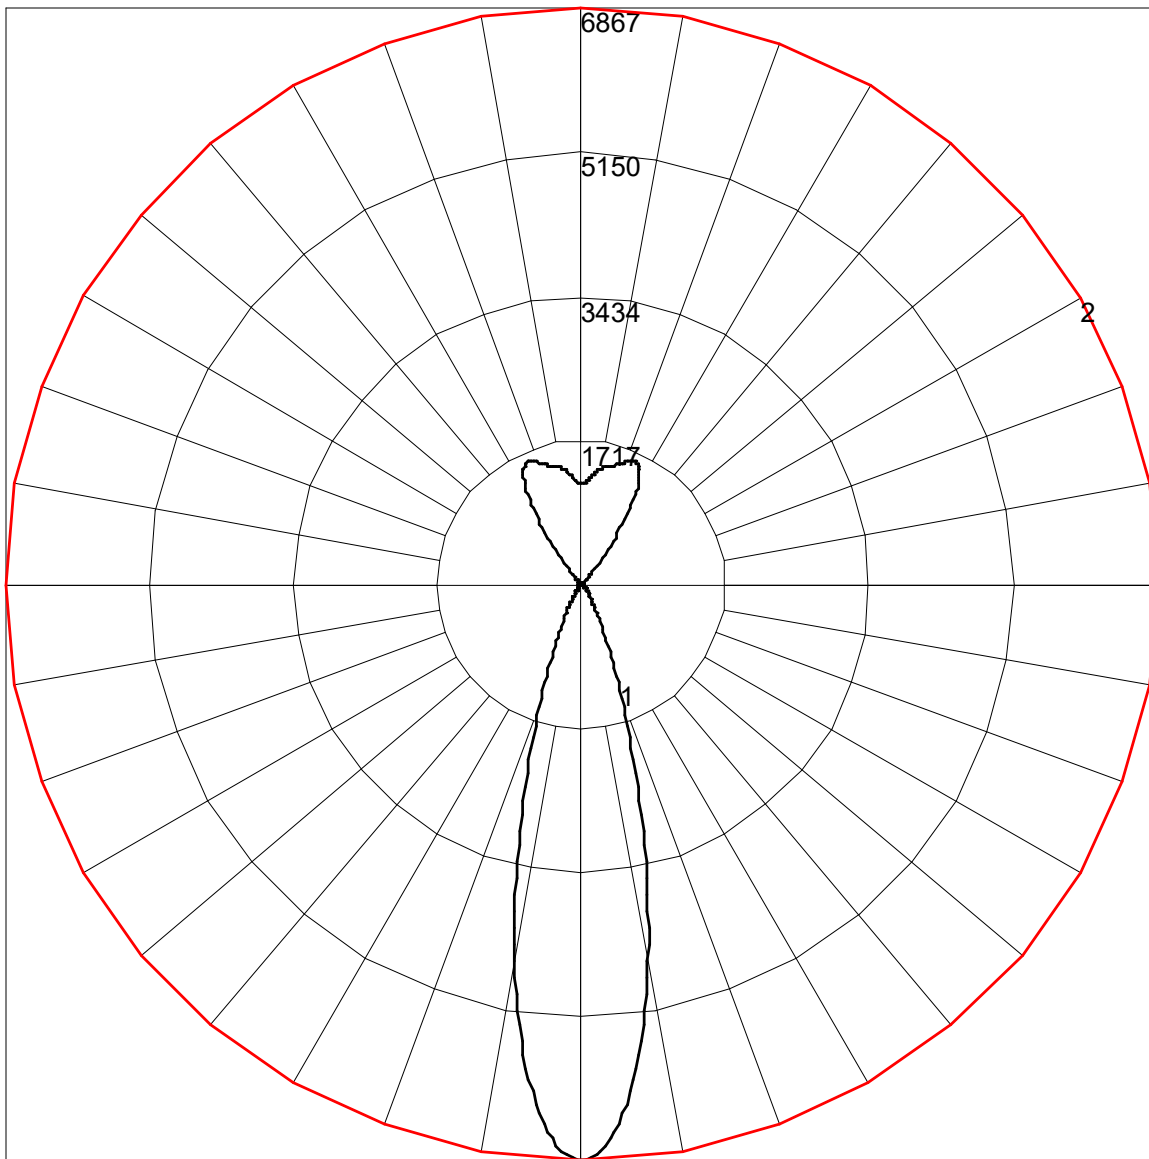

Maximum Candela = 6867 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)